

Gigaset

S820-S820 A

Congratulations

By purchasing a Gigaset, you have chosen a brand that is fully committed to sustainability.

This product's packaging is eco-friendly!

To learn more, visit www.gigaset.com.



GIGASET. INSPIRING CONVERSATION.
MADE IN GERMANY

Gigaset S820/S820A – Touch & Type

Touchscreen/display

Status bar (→ page 20)

Icons (→ page 56) show the telephone's current settings and operating status. Touch the status bar to open the status page (→ page 20).

Idle display (→ page 16) or menu page (→ page 17)

Handset keys

Side keys

Set the volume during a call

 Talk key

Dial displayed number, accept call, switch between earpiece and handsfree mode, Press **briefly**: open redial list
Press and **hold**: start dialling

 Menu key

Open the main menu/return to the idle display (→ page 17)

 End call/end key

Press **briefly**: end call/paging call, reject internal call, return to idle status
Press and **hold**: switch handset on/off

Star key

Press and **hold**: activate/deactivate ringtones (→ page 25)

Hash key

Press and **hold**: activate/deactivate keypad and display lock (→ page 16)

Recall key

Recall (flash),
Press and **hold**: enter dialling pause

Message key

Call up messages page (→ page 18)

Mini USB connection socket

Connect the handset to your PC
(Gigaset QuickSync → page 53)



Registration/paging key on the base

Press **briefly**: start paging (→ page 36)

Press and **hold**: set base to registration mode (→ page 35)

Answer machine display

(S820A only)

No light: answer machine is deactivated or base in registration mode

Light: answer machine is activated

Message/registration mode display

Pulsing: new messages received

Flashing: base in registration mode (→ page 35)

Flashing quickly: answer machine memory is full (S820A only)

Contents









Gigaset S820/S820A – Touch & Type	1
Safety precautions	4
Getting started	6
Understanding the operating steps	15
Using the telephone	16
Making calls	20
Changing phone settings	23
ECO DECT	29
Answer machine (Gigaset S820A)	30
Network mailbox	34
Multiple handsets	35
Bluetooth devices	38
Contacts (address book)	40
Call list	44
Calendar	45
Alarm	47
Baby phone	48
SMS (text messages)	49
Synchronisation with your PC (Gigaset QuickSync)	53
Connecting the base station to the PABX/router	54
Display icons	56
Setting options	58
Customer Service & Assistance	61
Manufacturer warranty (Middle East)	63
Service Centres (Middle East)	64
Environment	69
Appendix	70
Accessories	73
Index	77

Safety precautions

Warning

Read the safety precautions and the user guide before use.

Explain their content and the potential hazards associated with using the device to your children.

	Use only the power adapter indicated on the device.
	Use only rechargeable batteries that correspond to the specification (see "Technical Data"). Never use a conventional (non-rechargeable) battery or other battery types as this could result in significant health risks and personal injury. Rechargeable batteries, which are noticeably damaged, must be replaced.
	Using your telephone may affect nearby medical equipment. Be aware of the technical conditions in your particular environment, e.g., doctor's surgery. If you use a medical device (e.g., a pacemaker), please contact the device manufacturer. They will be able to advise you regarding the susceptibility of the device to external sources of high frequency energy (for the specifications of your Gigaset product see "Technical Data").
	Do not hold the rear of the handset to your ear when it is ringing or when speaker mode is activated. Otherwise you risk serious and permanent damage to your hearing. Your Gigaset is compatible with the majority of digital hearing aids on the market. However, perfect function with all hearing aids cannot be guaranteed. The phone may cause interference in analogue hearing aids (humming or whistling) or cause them to overload. If you require assistance, please contact the hearing aid supplier.
	The devices are not splashproof. For this reason do not install them in a damp environment such as bathrooms or shower rooms.
	Do not use the devices in environments with a potential explosion hazard (e.g., paint shops).
	If you give your Gigaset to a third party, make sure you also give them the user guide.
	Remove faulty devices from use or have them repaired by our Service team, as these could interfere with other wireless services.

Please note

- ◆ The device cannot be used in the event of a power failure. It is also **not** possible to transmit **emergency calls**.
- ◆ Emergency numbers cannot be dialled if the keypad lock is activated!

Getting started

Checking the package contents

- ◆ One Gigaset S820/S820A **base**
- ◆ One power adapter for the base
- ◆ One phone cord
- ◆ One Gigaset S820 **handset**
- ◆ One battery cover (rear cover for the handset)
- ◆ Two batteries
- ◆ One belt clip
- ◆ One rubber seal for the USB connection
- ◆ One user guide.

If you have purchased a model with multiple handsets, the package should contain two batteries, a battery cover, a belt clip and a charger with a power adapter for each additional handset.

Setting up the base and charger (if included)

The base and charging cradle are designed for use in dry rooms in a temperature range of +5°C to +45°C.

- ▶ Set up the base on a level, non-slip surface at a central point in the building or mount the base on the wall.

Please note

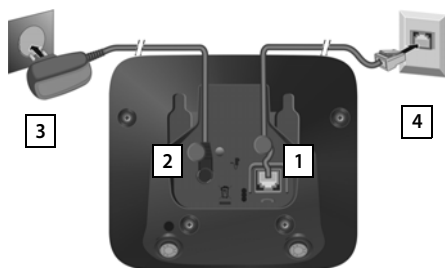
Pay attention to the range of the base. In buildings this is up to 50 m, outdoors up to 300 m. The range is reduced when ECO DECT (→ page 29) is activated.

The phone's feet do not usually leave any marks on surfaces. However, due to the multitude of different varnishes and polishes used on today's furnishings, the occurrence of marks on the surfaces cannot be completely ruled out.

Please note:

- ◆ Never expose the telephone to the effects of heat sources, direct sunlight or other electrical devices.
- ◆ Protect your Gigaset from moisture, dust, corrosive liquids and fumes.

Connecting the base with the phone network and the mains power supply




- ▶ Plug the telephone cable into the connection socket **1** on the back of the base until it clicks into place; then push the cable into the clips.
- ▶ Plug the power adapter cable into the socket **2** on the back of the base and twist the angle plug underneath the cable clips.
- ▶ **First**, connect the power adapter **3**.
- ▶ **Then** connect the phone jack **4**.


Please note:

- ◆ The power adapter must **always be connected**, as the phone will not operate without a power supply.
- ◆ Only use the power adapter and phone cord **supplied**. Pin connections on telephone cables can vary (pin connections, → page 71).

Wall mounting the base (optional)



Connecting the charger (if included)



- ▶ Connect the flat plug to the charger cradle **1**.
 - ▶ Plug the power adapter into the plug socket **2**.
- If you have to remove the plug from the charger again:
- ▶ Disconnect the power adapter from the mains power supply.
 - ▶ Press the release button **3** and disconnect the plug **4**.

Setting up the handset for use

The handset's display and keys are covered with a protective film.

Please remove the protective film!

Caution

Please do **not** use any touchscreen styli to operate the handset!

Do not use any protective sleeves/films from other manufacturers, as they may restrict the operation of your handset.



Inserting the rubber seal for the USB plug socket

Open the battery cover and insert the rubber seal into the groove.



Inserting the battery and closing the battery cover

Caution

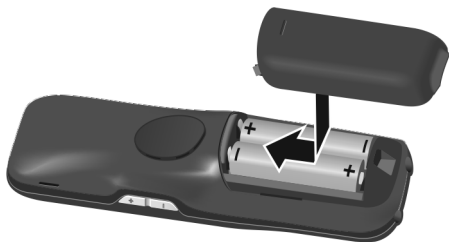
Use only rechargeable batteries (→ page 70) recommended by Gigaset Communications GmbH, as this could otherwise result in significant health risks and personal injury. For example, the outer casing of the batteries could be destroyed or the batteries could explode. The phone could also malfunction or be damaged as a result of using batteries that are not of the recommended type.

- ▶ Insert the batteries with the polarity in the correct direction.

The polarity is indicated in the battery compartment.



- ▶ Insert the battery cover from above.
- ▶ Then press the cover until it clicks into place.



To **reopen the battery cover** to replace the battery:


- Insert your fingernail into the notch on the top of the cover and push downwards.



Attaching the belt clip

The handset has notches on each side to attach the belt clip.

- ◆ **To attach** – press the belt clip onto the back of the handset so that the protrusions on the belt clip engage with the notches.
- ◆ **To remove** – press the centre of the belt clip firmly with your right thumb, push the fingernail of your left index finger up between the clip and the housing, and pull the clip in an upward direction.



Charging the battery

The battery is supplied with a partial charge. The batteries are fully charged when the lightning icon ⚡ on the display goes out.



- Place the handset into the base for **9.5 hours** or into the charger for **14.5 hours**.

Please note

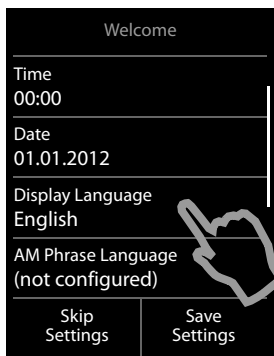
- ◆ The handset may only be placed in the designated base or charger.
- ◆ Handsets contained in the package have already been registered to the base. If, however, a handset has not been registered (display "**Handset not registered to any base**"), please register it manually (→ page 35).
- ◆ The battery may heat up during charging. This is not dangerous.
- ◆ After a time, the charge capacity of the battery will decrease for technical reasons.

Setting up the base and handset – installation wizard

The installation wizard starts automatically the first time your handset is connected to the base after switching on or after registration. It helps you to configure the following key settings on the handset and base. These keys are required for operation:

- ◆ Time and date
- ◆ Display language
- ◆ Answer machine language (S820A only)
- ◆ Country in which the phone will be used
- ◆ Your own area code

Note: Some fields will not be displayed if your handset is registered with a base that has already been configured.



Setting the display language


The current language is displayed under **Display Language**.

If you want to change the setting:


- ▶ Touch the **Display Language** field.

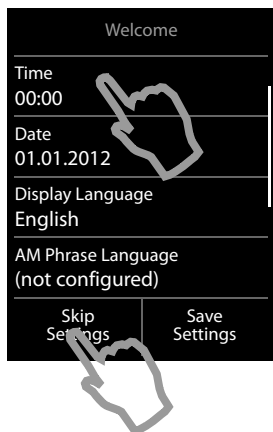


The current language setting is indicated by .

- ▶ Touch the  icon next to the language you want to set.

If your language is not displayed, the list may be "longer" than the display. You must then scroll through the list. To do this, put a finger on the display and move it slowly upwards.

- ▶ Touch the  icon. The setting is saved automatically. You return to the **Welcome** page.



If you want to adjust the settings at a later date:

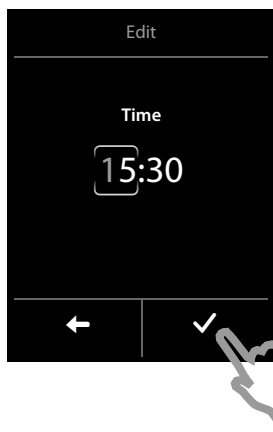
- ▶ Touch the **Skip Settings** option at the bottom of the display.

The handset then switches to idle status.

You can configure the settings at any time using the **Settings** menu on your handset.

To configure the settings:

- ▶ Touch the **Time** and **Date** fields in sequence.




Setting the time

The current position is shown in colour and the digit flashes.

- ▶ Enter the digits via the keypad. The cursor position moves one space to the right each time a digit is entered. You can change the cursor position by touching the digit you want to change.
- ▶ Touch the ☒ icon to save your changes or press to return to the **Date and Time** page without saving any changes.

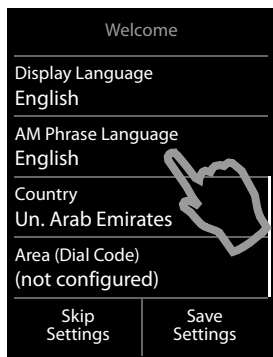
Please note: When 12 hrs mode is activated, **am/pm** will appear next to the input field.



Setting the date

The current position is shown in colour and the digit flashes.

- ▶ Enter the digits via the keypad. The cursor position moves one space to the right each time a digit is entered. You can change the cursor position by touching the digit you want to change.
- ▶ Touch the ☒ icon to save your changes or press to return to the **Date and Time** page without saving any changes.



Welcome

Display Language
English

AM Phrase Language
English

Country
Un. Arab Emirates

Area (Dial Code)
(not configured)

Skip Settings Save Settings

Setting the answer machine language

- ▶ Touch the **AM Phrase Language** field.
- ▶ Set the answer machine language as described above.

Setting the country


The country in which you are going to use the phone and for which it is authorised must be indicated under **Country**. If the setting is not correct:

- ▶ Touch the **Country** field.
- ▶ Set the country as described above.

Please note

If you have selected **Other Country** instead of a country, the **Welcome** page will also show the **Country (Dial Code)** entry.

- ▶ Press **Country (Dial Code)** and enter the **International Prefix** and **International Area Code** for the international country code as described below for the local area code.

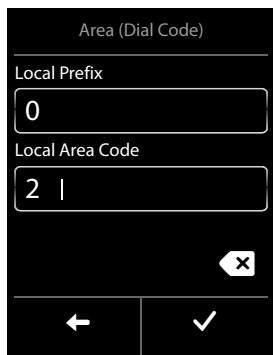


Area (Dial Code)
(not configured)

Skip Settings Save Settings

Entering the local area code

- ▶ Touch the **Area (Dial Code)** field.



Area (Dial Code)

Local Prefix
0

Local Area Code
2 |

✕

← ✓

The **Local Prefix** is the country-specific area code that precedes the **Local Area Code** when the country code is not dialled. In United Arab Emirates, the "0" **Local Area Code** is then e.g., 2 for Abu Dhabi.

- ▶ Enter the **Local Prefix** of your country (max. 4 characters; "0" in the example). The field is already populated for the selected country.
- ▶ Briefly touch the second input field and enter the **Local Area Code** (maximum 8 characters, "2" in the example). You can correct incorrect entries using ✕.
- ▶ Touch ✓ after entering the numbers to save the entry.

Welcome

Display Language
English

AM Phrase Language
English

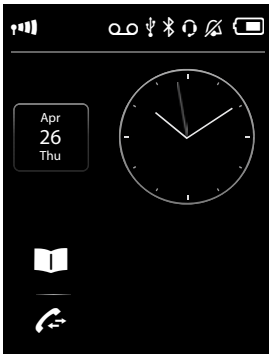
Country
Un. Arab Emirates

Area (Dial Code)
02

Skip Settings Save Settings

The **Welcome** page is displayed again.

- ▶ Touch the **Save Settings** option to save your settings.



Once you have configured all the necessary settings, your handset switches to idle status.

Your phone is now ready for use.

What would you like to do next?

After successfully setting up the phone, you can make calls straight away, customise your Gigaset according to your requirements or firstly familiarise yourself with the operating features.

Customising the idle display

You can select the functions you use most often to design the display according to your needs. Customisation allows you to directly access up to 6 functions such as alarm, calendar, contacts, call lists, etc., and call them up with a single touch of an icon (→ page 16).

Synchronising with contacts in Google or Outlook

Synchronise your handset's contacts using your PC and our Gigaset QuickSync software (→ page 53).

For the free download and more information, see www.gigaset.com/gigaset820.

Setting ringtones

Assign specific tunes to internal and external calls, reminders, wake-up calls and to certain callers (→ page 25).

Protecting yourself from undesired calls

Use the time control function or the blacklists. Set your telephone so that it does not ring when you receive an undesired call (→ page 26).

Setting up the answer machine

Record your own announcements and set your recording parameters (→ page 30).

Registering existing Gigaset handsets to the base

Continue using these handsets to make calls from your new base. Transfer contacts entries from these handsets to your new handset (→ page 35/→ page 41).

Configuring ECO DECT settings

Reduce the transmission power (emissions) of your phone (→ page 29).










Download your personal ringtones and images to your handset

Connect your handset to your PC via Bluetooth/USB and download ringtones and images to your handset with the help of our **Gigaset QuickSync** software. For the free download and more information, see www.gigaset.com/gigaset820.

If you have any questions about using your phone, please read the tips on troubleshooting (→ page 66) or contact our Service team (→ page 61).

Understanding the operating steps


In this user guide, the keys on your Gigaset handset are depicted as follows:

 /  / 	Talk key/menu key/end call key
 0 to  9	Digit/letter keys
 * /  #	Star key/hash key
 /  R	Message key/R key

All of the other icons are fields you need to touch on the touchscreen.



Example 1:

Menu key  ►  **Baby Phone**

► Press the  **menu key** in idle status. The **Applications** menu page is displayed.

► Touch the  icon.

Example 2:

Menu key  ► **Settings** menu page ►  **Language +Location**



► Press the  **menu key** in idle status ► Touch **Settings** in the right-hand side of the header to switch to the **Settings** menu page.

► Touch the  icon.


Using the telephone

The Gigaset S820/S820A has a unique operating concept. It combines the benefits of the touchscreen with those of a conventional keypad. You navigate around the menu settings and applications and activate/deactivate functions via the touchscreen and can enter numbers and letters via the keypad.

Switching the handset on/off

- ▶ Press and **hold** the end call key  in idle status to switch the handset off. You will hear a melody.
- ▶ Press and **hold** the end call key  again to switch the handset on again.

Returning to idle status

- ▶ **Briefly** press the end call key .


Or:

- ▶ If you do not press any key and do not touch the display, the display **automatically** reverts to idle status after approximately three minutes.

Keypad and display lock

The keypad and display lock prevents the phone being operated unintentionally. If you touch the display or press a button when the lock is activated, a corresponding message is displayed.

Activating/deactivating the keypad and display lock

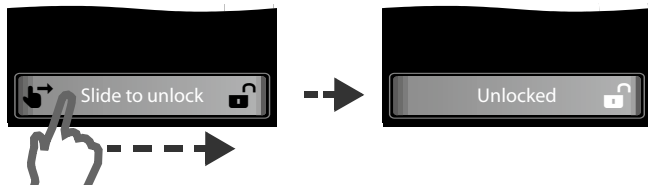
- ▶ Press and hold the  key to activate or deactivate the lock.

If a call is signalled on the handset, the keypad/display lock automatically deactivates and you can accept the call. The lock reactivates once the call has finished.

Activating/deactivating the automatic display lock

The display is automatically locked during a call or when listening to the answer machine to prevent inadvertent operation. You can briefly deactivate the lock (for 5 seconds) to operate the telephone via the display. The lock then reactivates automatically.

To unlock slide across the display from left to right, pressing down on the bottom line.



Please note

When the keypad lock is active, you cannot call emergency numbers.

Operating the touchscreen

You operate the handset mainly via the display.

Icons, list entries, switches and selection areas shown on the display are touch sensitive areas. Touching these areas allows you to set and start functions and navigate between the various display screens (pages).

Selecting functions/list entries

Touch a list entry or the corresponding icon to select the list item (contacts, submenu, call lists) or to activate/deactivate a function.

Scrolling in lists and menus (scrolling vertically)

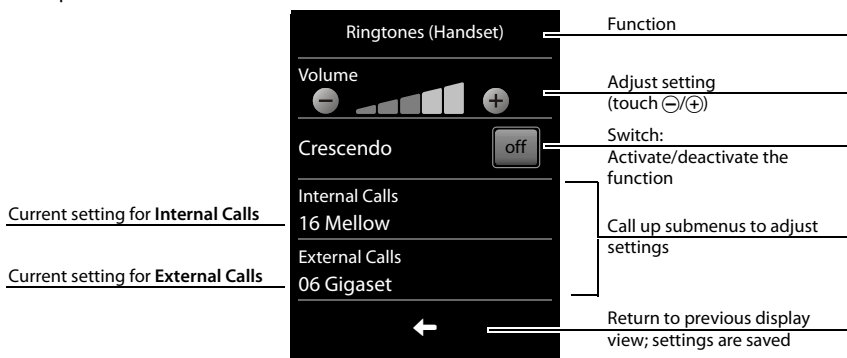
If there are more elements than those shown, a scroll bar appears on the right of the display. This shows the size and position of the visible section.

Slide vertically over the display **while pressing down** to scroll through the display.

Changing settings (user interface elements)

Touch an icon on one of the menu pages to open the corresponding application/function. The display shows the adjustable parameters and their current settings (marked orange), selection options or switches for activating/deactivating an application/function.

Examples:



Switch: Switching functions on/off (activating/deactivating) or selecting functions


Touch the switch briefly to activate/deactivate or select/deselect functions.

The function is activated or selected if the switch is orange (text **on**) or the switch is light grey (✓ icon).

Activated/
selected

or

Deactivated/
deselected




Using the telephone

Selection fields

If two or three alternative settings are available for one parameter, these alternatives are displayed in the form of selection fields. The current setting appears in orange.

- ▶ To change it, briefly touch the selection field you require.

Call Divert selection field (example)



Opening the sub-menu to set a parameter

- ▶ Briefly touch the parameter field to open the submenu.

Options and options bar

Many displays have an **options bar** at the bottom. This displays all the actions that you can apply in the current context.

- ▶ Touch an option to perform the corresponding action or touch **Options** to display a list of further options.

Options bar (example)



Return to the previous display

You will see the  icon on many pages.


- ▶ Touch the icon to return to the previous display page.


Entering numbers and text

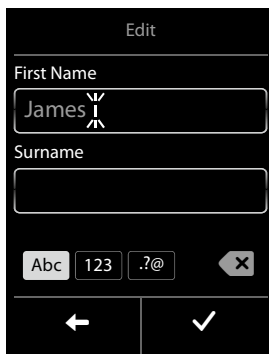
Use the keypad to enter characters.

When numerous number and/or text fields are displayed (e.g., **First Name** and **Surname** in a contacts entry), the first field is automatically activated. You need to touch any subsequent fields to activate them. A field is activated when the flashing cursor appears in the field.







Correcting incorrect entries

Briefly touch  to delete the **character** in front of the cursor.

Touch and hold  to delete the **word** in front of the cursor.




Entering text

- ◆ Each key between  and  is assigned several letters and characters. The characters are displayed in a selection line at the bottom of the screen when you press a key. The selected character is highlighted. Briefly press the key several times in succession to select the required letter/character.
- ◆ The letter/characters are inserted at the cursor position. You can move the cursor by touching the desired position in the input field.
- ◆ Touch the  field to switch between lower and upper case for the **subsequent letters**.
- ◆ When editing a contact entry, the first letter and each letter following a space is automatically in upper case.
- ◆ Touch  if you want to enter a digit. Touch  to return to the letter keypad (upper/lower case).
- ◆ Touch  to open the table with special characters. Touch the desired character to enter it.
- ◆ You can enter special characters (marked/diacritical characters e.g., umlauts) by pressing the corresponding key repeatedly; see character set tables → page 72.


Making calls

Making an external call


- ▶ Enter the number and **briefly** press .

Or:


- ▶ Press and **hold** , enter number.

You can cancel dialling by pressing .


Dialling with the redial list

- ▶ **Briefly** press  to open the redial list.

You have the following options:

- ▶ Press . The phone dials the last dialled number (marked with a green dot).

Or:

- ▶ Touch an entry to open the detail view.
 - ▶ Press . The number of the entry marked with the green dot is dialled.
- Or:
- ▶ Touch the desired number.

Please note


The redial list contains the last twenty numbers dialled with this handset. You can manage them in the same way as the message lists on your telephone:

- ▶ **Open the detail view:** Touch the entry. The display shows all the available information. In the detail view, you can delete the entry or add the number to the contacts (→ page 43).



Dialling from the call list

Menu key  ▶  **Call List**

You have the following options:

- ▶ Press . The number of the entry marked with the green dot is dialled.





Or:

- ▶ Touch an entry to open the detail view.
 - ▶ Press . The number with the green dot is dialled.
- Or:
- ▶ Touch the field with the green dot.
 - **No entry in contacts:** The number is dialled.
 - **Entry in contacts:** Detail view opens.
 - ▶ Press . The phone dials the last dialled number (marked with a green dot).

Or:

- ▶ Touch the desired number.

Call list (example)

All Calls		
● James Foster		
 18:30, Home		
01712233445566		
 11.06., 18:30		
0168123477945		
 10.06., 17:13		
<div>  <div>Show all</div> <div>Show by type</div> </div>		

Please note



If you have **new messages** you can open the call list via the **message pop-up** or the **message page**.

Dialling via Contacts


Menu key  ►  **Contacts**

- Scroll through your contacts until the desired entry appears.

You have the following options:

- Press  to dial the number **marked in green**.
 - There is **only one number** saved: The number is dialled immediately.
 - There are **numerous numbers** saved: The detail view opens.
 - Press . The number with the green dot is dialled.
- Or:
 - Touch the desired number.



Or:


- Touch the name of an entry to open the detail view.
 - Press . The number of the entry marked with the green dot is dialled.
- Or:
 - Touch the desired number.


One touch call

You can set your phone to dial a previously stored number when you touch **any** key. This enables children who are still too young to enter a number to call a specific number, for example.

Menu key  ►  **One Touch Call**



- Touch  Enter the number you wish to call or edit a stored number. ► Press .
- Activate one touch call with **on**.
If no number has been saved yet, the menu for entering a number is opened. The one touch call function appears on the display when it is activated.

The previously stored number is selected by touching the key. Press the end call key  to cancel dialling.

Exit one touch call mode: Press and hold  key.

Accepting a call

You have the following options:

- Press .
- If **Auto Answer** is activated (→ page 24), remove the handset from the charger.
- Gigaset S820A: Touch  to **divert the call to the answer machine** (→ page 32).

Accepting a call on a Bluetooth headset: → page 39.

Accepting a call on the Gigaset L410 handsfree clip (→ page 76): Press the talk key.

You need to register your L410 with the Gigaset S820/S820A base before you can use it. Follow the instructions for the Gigaset L410.

Call display

For Calling Line Identification

The caller's phone number is displayed. The display also shows the number type and the name of the entry in the contacts if the caller's number is stored in your contacts. If you have assigned a picture to the caller's number (→ page 40), it also appears on the display.

No Calling Line Identification

Instead of name and number, the following is displayed:

- ◆ **External:** No number is transferred.
- ◆ **Withheld:** Caller has withheld calling line identification.
- ◆ **Unavailable:** Caller has not requested calling line identification.

Notes on phone number display CLIP

The default setting on your phone is set to display the caller's number, → page 67 or

▶ www.gigaset.com/service

Speaker

If you are going to let someone listen in, you should tell the other party that this is happening.

Activating handsfree mode while dialling


- ▶ Enter the number, press  twice.

Switching between earpiece and handsfree mode




During a call, when establishing the connection and when listening to the answer machine (Gigaset S820A only):

- ▶ Press .

Place the handset in the charger during a call:

- ▶ Press and hold the  key while placing the handset in the charger and hold for a further 2 seconds.

Changing the earpiece, handsfree and headset volume

Use the side keys  /  (→ page 1) to adjust the volume for the current mode (handsfree, earpiece, headset) during a call. The current setting appears on the display . The setting is saved automatically after approximately 2 seconds and the display returns to the previous screen.

Activating/deactivating the microphone (muting)

If you turn the microphone off during a call, your caller can no longer hear you.

- ▶ Touch  to switch the microphone on and off.

Changing phone settings



The handset and base are preconfigured, but you can change the settings to suit your individual requirements.

You can change settings either during a call or in idle status via the **Settings** menu page.

Changing the display language

Menu key  ▶ **Settings** menu page ▶  **Language and Location** ▶ **Display Language**
▶ select the language ( = selected) ▶ 

Setting the country and your own area code


Menu key  ▶ **Settings** menu page ▶  **Language and Location**

▶ Next → page 12.

Setting the display on the handset




Setting the screensaver/Slideshow

You can define a screensaver for the display's idle status. Choose between an analogue clock/digital clock/picture/slideshow. You can load pictures onto your handset using the **Gigaset QuickSync** software (→ page 53).

To show the idle display again, briefly press  or the display.

Menu key  ▶ **Settings** menu page

▶  **Display** ▶ **Screensaver**



- Use the switch to activate/deactivate the screen-saver.
- Select the screensaver:
▶ **Selection** ▶ Use  or  in the header to browse through the selection ▶ **Select** or touch  to go back without saving.



Setting the display backlight

The display backlight lights up as soon as you press a key, touch the display or remove the handset from the base/charger.

You can specify the period of time in idle status after which the display backlight is switched off. If no period is set, the display is permanently dimmed.

Menu key  ▶ **Settings** menu page ▶  **Display** ▶ **Backlight**

- Activate/deactivate the display backlight in or out of the charger.
- Select **Timeout**.

Please note

The handset's standby time can be significantly reduced if the display backlight is activated.

Activating/deactivating the flashing message key

Specify whether or not the message LED on the handset should flash to signal the receipt of new messages.

► In idle status: **menu key**  ► * 0 # 0 5  #

► Press the following keys to select the message type:

 5 

For missed calls

 6 


For new SMS



 7 

For messages on the answer machine
(Gigaset S820A only)/network mailbox

► Confirm with .

You can see the message type (e.g., 7/5) in the header; the current setting (e.g., 0) is displayed in the input field.

► If you want to change this setting: delete with the  icon.

Press the  or  key to configure the settings for new messages:





The message key flashes

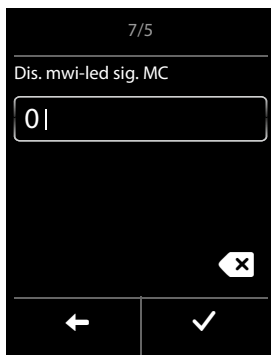
or

(it goes off when the key is pressed)



The message key does not flash


► Confirm with  or touch  to return to the idle display without saving any changes.



Activating/deactivating auto answer

In the case of auto answer, the handset accepts an incoming call as soon as you take it from the charger.

Menu key  ► **Settings** menu page ►  **Telephony** ► **Auto Answer on/off**

The connection is terminated as soon as you return the handset to the charger, regardless of the **Auto Answer** setting. Exception: You press  when returning the handset to the charger and hold it for two more seconds when it is in place.

Setting the handsfree/earpiece profile

You can set various **handsfree** and **earpiece** profiles to optimally adapt your phone to your environment. Try them out to see which one you prefer.

During an external call: **Options** ► **Acoustic Profiles**



- ◆ **Handsfree profiles:** Handsfree 1 ... Handsfree 4. The default setting is **Handsfree 1**.
- ◆ **Earpiece profiles:** Earpiece 1 and Earpiece 2. The default setting is **Earpiece 1**.

Setting ringtones

Setting volume, melody

Menu key  ► Settings menu page ►  Audio Settings ► Ringtones (Handset)

Ringtone volume for all calls


- Touch  / , several times if necessary, to adjust the volume.

Or

- Activate/deactivate the crescendo ringtone (increasing volume) with the **Crescendo** switch.

The activated crescendo only applies to ringtone volume. It does not affect how a melody is played back.


Setting the ringtone for external/internal calls


- **Internal Calls/External Calls** ► Select the ringtone
 - Go back with .


You can load additional ringtones onto your handset using the **Gigaset QuickSync** software (→ page 53).



Activating/deactivating the ringtone


Permanently activate/deactivate the ringtone: Press and **hold** the star key .


When the ringtone is deactivated,  appears in the status bar.


Deactivate the ringtone for the **current call**: Press **Silence** or .

Activating/deactivating the alert tone

You can activate an alert tone instead of the ringtone.

Press and **hold** the star key  and **within 3 seconds** ► **Beep**.

When the alert tone is activated,  appears in the status bar.

Press and **hold** the star key  to deactivate the alert tone.

Activating/deactivating advisory tones


Your handset uses advisory tones to tell you about different activities and statuses. These advisory tones can be activated/deactivated independently of each other.

Menu key  ► Settings menu page ►  Audio Settings ► Advisory Tones

- **Confirmation**
Confirmation/error tone after input; advisory tone on receipt of a new message.
- **Key Click**
Key press/touch tone.
- **Battery Warning**
Warning tone when the battery charge is less than 10% (every 60 seconds). The battery warning tone does not sound when the baby phone is activated.

Setting the time format/date order

Menu key  ▶ Menu page **Settings**

▶  **Date + Time**

▶ **Time Format**

▶ Select time format ( = selected)

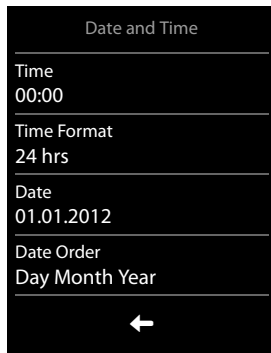
▶ Back with . The setting is saved automatically.

▶ **Date Order**

▶ Select date order ( = selected)

▶ Back with . The setting is saved automatically.



To set the time and date, proceed as described on page 11.



Protection from undesired calls

Setting time control for external calls

You can specify a time period when you want the telephone to ring quietly or not at all.

Menu key  ▶ **Settings** menu page ▶  **Call Protection** ▶ **Time Control** ▶ **Activation Mode**

▶ **Off**: No time control.

Or:

▶ **No Call Sound**: Your telephone does not ring.

Or:

▶ **Quiet Call Sound**: Your telephone rings with a volume defined by you in the following step.

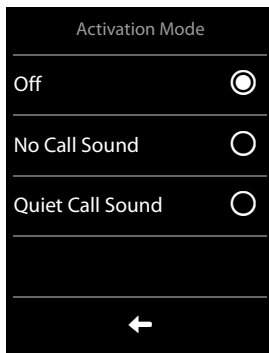
▶ Back with .

◆ For **No Call Sound**: ▶ Enter time period.

◆ For **Quiet Call Sound**: ▶ Set ringtone volume

▶ Enter time period.

▶ Back with .



VIP caller

You can define a list of callers for whom your telephone should ring even when time control is activated. To do so, select entries from your contacts.

Menu key  ▶ **Settings** menu page ▶  **Call Protection** ▶ **Time Control** ▶ **VIP Callers**

Either ▶ **New Entry** ▶ Add entry from contacts to list

Or ▶ Select entry ▶  Delete entry

You have to set this function individually on each handset.

Protection from anonymous callers

You can set your telephone so that anonymous calls (where the caller has suppressed calling line identification) are either rejected or only appear in the display.

The setting applies for all registered handsets and the base.

Menu key  ▶ **Settings** menu page ▶  **Call Protection** ▶ **Anonymous Calls** ▶ **Protection Mode**

▶ **No Protection:** No protection from anonymous calls.

Or:

▶ **Silent Call:** Your telephone does not ring and the call is shown on the display.

Or:

▶ **Block Call:** Your telephone does not ring and the call is not displayed.

Blacklist

If the blacklist function is activated, calls from blacklisted numbers are either rejected or only appear in the display.

The setting applies for all registered handsets and the base.

Editing the blacklist

Menu key  ▶ **Settings** menu page ▶  **Call Protection** ▶ **Black List** ▶ **Blocked Numbers**

▶ **New Entry** ▶ Enter the number.

Or:

▶ **Select entry** ▶  **Delete entry.**

Activating/deactivating the blacklist

Menu key  ▶ **Settings** menu page ▶  **Call Protection** ▶ **Black List** ▶ **Protection Mode**

▶ **No Protection:** The blacklist is not active.

Or

▶ **Silent Call:** Your telephone does not ring and the call is shown on the display.

Or

▶ **Block Call:** Your telephone does not ring and the call is not displayed.

The caller hears the busy tone.

Activating/deactivating music on hold

Music on hold for external callers can be activated/deactivated for consultation call and call divert.

Menu key  ▶ **Settings** menu page ▶  **Audio Settings** ▶ **Music on Hold on/off**

Activating/deactivating repeater

The Gigaset repeater can be used to increase the reception range between your Gigaset handset and the base. To do so, you must activate repeater operation. During activation, calls currently taking place via the base are cancelled.

Menu key  ▶ **Settings** menu page ▶  **System** ▶ **Repeater Mode on/off**

After activating or deactivating the repeater, switch your handset off and on again (→ page 16).

Please note

- ◆ If you are using a repeater, ECO DECT settings (→ page 29) are not available.
- ◆ You can register up to 6 Gigaset repeaters.

Changing the system PIN

Menu key  ▶ Settings menu page ▶  System ▶ Security ▶ System PIN ▶ Enter current PIN (factory setting: 0000) ▶  ▶ Enter new system PIN (4 digits; 0 - 9) ▶ 

Resetting the system PIN

If you have forgotten your system PIN, you can reset it to **0000**. If you do this, **all the base settings** are reset and **all the handsets** are de-registered!

- ▶ Remove the power cable from the base.
- ▶ Press and hold the registration/paging key on the base (→ page 2) and at the same time reconnect the power cable to the base.
- ▶ Press and hold the registration/paging key for at least 5 seconds.

Restoring the phone to the factory settings

You can reset individual changes to the base and handset separately.




The following are **not** affected by the reset:

- ◆ Date and time
- ◆ Settings for the configurable page
- ◆ Registrations of handsets to the base and the current base selection
- ◆ System PIN
- ◆ Entries in the calendar and in the contacts
- ◆ Redial list
- ◆ Stored external and internal destination numbers for the baby phone (**Forward alarm to** is reset to **External**),
- ◆ Destination number for call divert

Resetting the handset (**Handset Reset**) deletes your audio and display settings.

Resetting the base (**Base Reset**) resets the settings for ECO DECT, SMS, answer machine, system settings and the internal names of handsets, and also deletes call/answer machine lists.

Resetting the handset/base

Menu key  ▶ Settings menu page ▶  System ▶ Resets ▶ Handset Reset/Base Reset
▶ For **Base Reset**: Enter the system PIN  ▶ Answer **Yes** to the security prompt

ECO DECT indicates low energy consumption and reduced transmission power.

Reduced transmission power (radiation)

In normal operation mode (factory setting):

On delivery, the device is set to maximum range. This guarantees optimised wireless management. The handset does not emit a signal in idle status (no radiation). Only the base ensures contact with the handset is maintained through low-strength wireless signals. During a call the strength of the wireless signal is adapted automatically to the distance between the handset and base. The smaller the distance between the handset and base, the lower the transmission power.

You can further reduce the transmission power as follows:

1) Reducing the range to decrease transmission power by up to 80%

Many apartments, business premises, offices, etc., do not need the maximum range. If you deactivate the **Maximum Range** setting, transmission power during a call is reduced to 80% at half the range.


Menu key  ▶ Settings menu page ▶  System ▶ ECO DECT ▶ Maximum Range on/off

Display icon for reduced range → page 56.



2) Deactivating the DECT wireless module in idle status (Eco mode+)

You can deactivate the wireless signal output from the base completely in idle status via the **No Radiation** setting.

Menu key  ▶ Settings menu page ▶  System ▶ ECO DECT ▶ No Radiation on/off



When the wireless module is deactivated the idle display shows the  icon instead of the signal strength icon.

Please note

- ◆ To benefit from **Eco mode+**, all registered handsets must support this function.
- ◆ The wireless connection is established automatically for incoming or outgoing calls only. This causes a connection delay of approx. 2 seconds.
- ◆ Handsets need to "listen in" to the base, i.e., scan the surrounding area, on a regular basis to enable them to establish a connection to the base quickly in the event of an incoming call. This increases power consumption and therefore reduces the handset's standby time and talktime.
- ◆ When **Eco mode+** is activated (no radiation) the handset does not display a range indicator/range warning. You can check availability by calling a line: Press and hold the talk key . You hear the dial tone.
- ◆ If a handset registered on a base in **Eco mode+** does not support this feature, **Eco mode+** is automatically deactivated (range indicator  is activated on handsets and the switch turns to **Off**). As soon as the incompatible handset is de-registered again, **Eco mode+** is reactivated automatically.

Answer machine (Gigaset S820A)

Activating/deactivating the answer machine

Menu key  ▶ Settings menu page
▶  Answer Machine ▶ Activation on/off


Setting up the answer machine

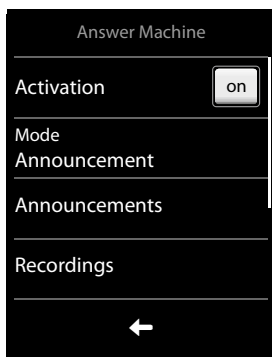
Defining Mode

Menu key  ▶ Settings menu page
▶  Answer Machine ▶ Mode

- **Announcement:** Caller can leave messages
- **Advisory Message:** Caller only hears a recorded message
- **Time Control:**


When activated, enter the time when each mode should be activated via **Announcement from/Advisory Message from**.


▶ Touch  to exit the sub-menu.





Recording a personal announcement/advisory message




▶ **Announcements** ▶ **Announcement** or **Advisory Message**

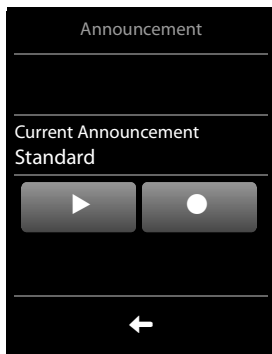
▶  ▶ Record an announcement after the ready tone (minimum 3 seconds up to a maximum of 180 seconds).

▶  Complete and save the recording.

Cancel a recording: Press the end call key  or  while recording.

After recording you can:

- **Play back the announcement:** Touch .
- **Repeat the recording:** Touch  during playback.
- **Delete the announcement:** Touch  and Yes to confirm.




Please note

- ◆ Recording ends if there is a pause lasting longer than 3 seconds.
- ◆ If you cancel the recording, the default announcement is used.
- ◆ If the answer machine's memory is full, it switches to **Advisory Message** mode. After old messages have been deleted, it switches back into **Announcement** mode.


Additional setting options

◆ Set the recording parameters:

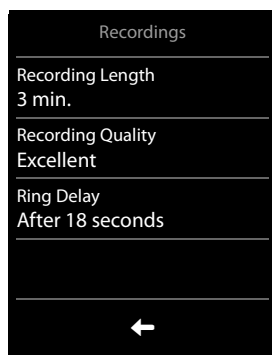
- ▶ Open the **Recordings** sub-menu.
- **Recording Length:** 1 min., 2 min., 3 min. or **Maximum**.
- **Recording Quality:** Longplay or Excellent.
- **Ring Delay:** No Delay, After 10 seconds, After 18 seconds, After 30 seconds or Automatic (10 seconds if there are new messages, otherwise 18 seconds).

Select your setting using the relevant parameter field (☉ = selected), save and return with .


◆ Switch call screening on/off on the handset:

Activate/deactivate the **Call Screening** switch.
Switch call screening off for the current recording:
Press the end call key .

- ◆ **Activate/deactivate playback of the recording time:** Turn the **Play Time Stamp** switch on/off.



Playing back messages

- ▶ Press and hold  key; the answer machine starts to play new messages straight away (**prerequisite:** no network mailbox is set up (→ page 34)).


Or:

- ▶ Message playback via the messages page: message key  ▶ 

The answer machine list is opened.

- Listen to all new messages: Touch **Play all new**.
- Listen to individual messages: Touch a list entry.
- Delete all old messages: **Delete all** (only available if there are **no** new messages)

The following options are available during playback:



- ◆ Adjust the playback volume using the side keys.
- ◆ Repeat the last 5 seconds of playback: **replay last 5 seconds**.
- ◆ Delete message: .
- ◆ Touch the caller's **number**: Playback is stopped; the caller is called back.
- ◆ Touch the caller's **name**: Playback is stopped; you can view the entry in the contacts.

Deleting all messages

Menu key  ▶ Settings menu page ▶  System ▶ Clean-up List ▶ Messages

- ▶ **Delete all messages on Answer Machine** ▶ Touch Yes to confirm.

More answer machine functions

- ◆ **Pick up call during answer machine recording**
Press the talk key  or **Accept**.
- ◆ **Divert call to answer machine:**
If the answer machine is switched on and the handset is displaying an external call: , the answer machine starts immediately in **Announcement** mode.
- ◆ **Recording of external call: Options ▶ Record**
End recording: **End Record**
Tell the other party that the call is being recorded.

Changing the language for the voice prompt and pre-recorded announcement

Menu key  ▶ **Settings** menu page ▶  **Language** + **Location** ▶ **AM Phrase Language**
▶ Select the language (English/French/ Arabic/Farsi;  = selected)

Operating when on the move (remote operation)

Check or activate the answer machine from another telephone (e.g., from a hotel, mobile phone).

Prerequisites: The current system PIN is set to something other than 0000 (→ page 28) and the other telephone has tone dialling (DTMF). Alternatively, you can use a code transmitter (available from retailers).


Activating the answer machine

Prerequisite: The answer machine is deactivated.

- ▶ Call your phone line and let it ring until you hear: "Please enter PIN".
- ▶ Enter the system PIN for your phone within 10 seconds.







Calling the answer machine and playing back messages

Prerequisite: The answer machine is activated.

- ▶ Call your phone line and press the  key while listening to your announcement ▶ Enter the system PIN for your phone.

You can operate the answer machine with the keypad.

The following keys are used:

-  During the time stamp playback:
Go to the previous message.
During message playback:
Go to the start of the current message.
-  Stop playback. Press again to resume.
After a pause of approx. 60 seconds, the connection is ended.
-  Go to the next message.
-  Skip back five seconds in the current message.
-  Delete current message.
-  Change the status of a previously played back message to "new".

Cancelling remote operation

- ▶ Press the end call key or replace the earpiece.


Please note


The answer machine will terminate the connection under the following circumstances:

- ◆ An incorrect system PIN has been entered.
- ◆ There are no messages on the answer machine.
- ◆ After the remaining memory has been specified.

Network mailbox

You cannot use the network mailbox unless you have **requested** it from your provider and saved the network mailbox number in your phone.

Menu key  ▶ **Settings** menu page ▶  **Network Mailbox**



- ▶ Enter the number of the network mailbox: **Access Number** ▶ Enter the number for the network mailbox ▶ Touch  to confirm.
- ▶ Activate/deactivate the network mailbox using the switch (if your network provider supports this function).

After saving the phone number, the following icon is displayed on the message page:




New messages
(if your network provider supports this function)

Playing back network mailbox messages

- ▶ Message key  ▶ .

Or:



- ▶ Press and **hold** key .

Your network mailbox is called directly. You can listen to the messages.

Multiple handsets

Registering handsets

You can register up to six handsets to your base. You must initiate registration of the handset on **both** the base **and** on the handset. Both must occur **within 60 seconds**.

- ▶ **On the base:** Press and **hold** (at least 3 seconds) the registration/paging key.
- ▶ **On the S820H handset** (for other handsets see "Notes"):
 - ▶ Touch Register
 - or
 - Menu key  ▶ Settings menu page ▶  HS + Base ▶ Register

This creates a connection to the base, but it may take some time.

- ▶ If necessary, enter the system PIN (default: **0000**) ▶ Confirm the PIN with .

Successful registration is shown on the display. Adjust the handset's setting using the **Settings** menu item (→ page 58).

Please note

- ◆ If six handsets are already registered with the base (all internal numbers occupied) then the handset assigned internal number 6 is replaced by the new handset. If this attempt is not successful, e.g. because this handset is being used to make or receive a call, the message **No free internal number** is displayed.
In this case, de-register another handset that is no longer required and repeat the registration procedure.
- ◆ You should start the registration procedure for **other Gigaset handsets** and handsets of other GAP-enabled devices in accordance with the respective operating instructions.


Using the handset on multiple bases

Your handset can be registered on up to four bases.

The active base is the last one your handset was registered with. The other bases are stored in the list of available bases.

You can change the allocation to a base **manually at any time**. Alternatively, you can set the handset so that it selects the base with the best reception (**Best Base**) as soon as the connection to the current base is lost.

Menu key  ▶ Settings menu page ▶  HS + Base ▶ Connect to Base

- ▶ Touch the selection icon for the desired base or touch **Best Base**  = selected)

Changing a base name or deleting a base



Menu key  ▶ Settings menu page ▶  HS + Base ▶ Connect to Base


- ▶ Touch the name field for the desired base
- ▶ Touch the name field and change the name

Or


- ▶ Delete Base

De-registering handsets

Menu key  ► Settings menu page ►  HS + Base

- ◆ You want to de-register the handset currently being used:
 - **De-register** ► If necessary, enter the system PIN and confirm with 
 - Confirm de-registration with **Yes**.

If the handset is still registered to other bases, it switches to the base with the best reception (**Best Base**; → page 35).



- ◆ You want to de-register another handset:
 - **Registered Handsets** ► Touch the handset you want to de-register ► **De-register Handset** ► If necessary, enter the system PIN and confirm with  ► Confirm de-registration with **Yes**.

Paging a handset

- Press the registration/paging key on the base station (→ page 2) **briefly**.



All the handsets ring simultaneously ("Paging"), even if the ringtones are deactivated (**Exception**: Handsets where the baby phone is activated).



Ending the search

- **On the base**: Press the registration/paging key again **briefly**, or
- **On the handset**: Press  or  or touch **Silence** or
- **No action**: After approx. 3 minutes, the paging call ends **automatically**.

Changing the handset name



When you register multiple handsets the names "INT 1", "INT 2" etc. are assigned automatically. To change the name:


Menu key  ► Settings menu page ►  HS + Base

- **Changing the name of the handset in use**: Touch **This Handset** or **Changing the name of a different handset**: Touch **Registered Handsets** ► Select handset
 - Touch the name you want to change.
- Delete the old name with  and enter the new name (max. 10 alphanumeric characters)
 - Confirm with .

Making internal calls

Internal calls to other handsets registered to the same base are free of charge.

Menu key  ►  **Internal Call** ► If necessary, select a handset from the list or touch **All Handsets** (group call).

After opening the list, press  to initiate a group call to all handsets.

Internal consultation/internal transfer


You are speaking with an **external** participant and want to consult an **internal** participant or transfer the call to him.

- ▶ **Consultation ▶ Internal** ▶ If more than two handsets are registered to the base, select one handset or **All**.


Consulting: You consult the internal participant and return to the external call:

- ▶ Touch **End**.

Transferring the external call: You have two options to transfer the external call:

- ▶ You wait until the participant answers your call and then you hang up.
Press .

Or:

- ▶ You hang up before the participant answers your call: Press .
- If the other participant does not answer your call, press **End** to cancel the consultation call.

Call swapping/establishing a conference call

You are engaged in one conversation whilst another one is on hold. Both participants appear in the display.

- ▶ **Call swapping:** On the display, touch the participant with whom you wish to speak.

Or:

- ▶ **Establishing a three-way conference:** Touch **Conference**.
Ending the conference: Touch **End Conf.**. You return to "call swapping" and are again connected to the participant with whom you initiated the conference.

Each of the callers can end their participation in the conference call by pressing the end call key and terminating the call.

Listening in to an external call

You are conducting an external call. An internal participant can listen in on this call and take part in the conversation (conference).


Prerequisite: The call is not recorded by the answer machine and the **Listening In** function is activated.

Activating/deactivating listening in

Menu key  ▶ Settings menu page ▶  Telephony ▶ **Listening In on/off**

Internal listening in

The line is engaged with an external call. Your screen will display information to that effect. You can listen in to the external call.

- ▶ Press and hold . All participants hear a signal tone. Call waiting is not displayed.

Ending listening in

- ▶ Press . All participants hear a signal tone.

Bluetooth devices

You can register up to five data devices (PC, PDA, mobile phones) and one Bluetooth headset. You must activate Bluetooth on the handset, ensure the devices are visible if necessary and then register the handset.



You can exchange contacts entries using the data devices and load ringtones and pictures to the handset using the **Gigaset QuickSync** software (→ page 53).

Please note


- ◆ A headset must have the **headset** or **handsfree profile**. The handsfree profile is preferred.
- ◆ Establishing a connection to a headset can take up to 5 seconds.

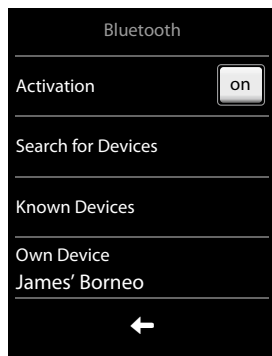
Activating/deactivating Bluetooth mode

You can activate/deactivate Bluetooth mode using the status page (→ page 20) or via

Menu key  ► **Settings menu page** ►  **Bluetooth**
► **Activation on/off**

If Bluetooth is activated:

- ◆  is displayed in the status bar (→ page 56).
- ◆ The handset can communicate with all devices in the **Known Devices** list.
- ◆ The handset is visible to Bluetooth devices within its range.
- ◆ If the known devices include a headset, the handset establishes a connection to this headset.



Finding and registering (trusting) Bluetooth devices

The distance between the handset and the activated Bluetooth device should be a maximum of 10 m.

Please note


- ◆ If you register a headset, any previously registered headset is overwritten.
- ◆ If a headset is already registered to another device, please **deactivate** this connection before starting the registration process.

Starting the search

► Start the search via **Search for Devices** in the **Bluetooth** sub-menu.

The handset searches for Bluetooth devices within its range. Located devices are added to the **Devices Found** list.

Trusting the device - adding the device to the known devices list


- ▶ Select the device in the **Devices Found** list ▶ **Trust Device** ▶ If necessary, enter the PIN of the device you want to register and press  to confirm.
- ◆ PIN for a **data device**: Enter any PIN on the handset and then also on the data device.
PIN for a **headset**: In general, **0000** is preset. Therefore, you only need to enter the PIN in exceptional cases.
- ◆ If the **Known Devices** already contains six entries, the last entry is overwritten.
Exception: A headset only overwrites a headset.

Ending the search


- ▶ Use  to exit the **Devices Found** list or touch **Stop Search**.

Editing the list of known (trusted) devices

A  next to the device name in the list indicates a headset and  indicates a data device.

- ▶ Open the **Known Devices** list ▶ Select device ▶ View device information ▶ Touch  to delete the device ▶ Touch **Yes** to confirm.

Or:


- ▶ Touch the **Name** field ▶ Change the name and touch  to confirm.

Rejecting/accepting an unregistered Bluetooth device





If an unknown Bluetooth device tries to establish a connection, you will be asked to enter the device PIN (bonding).

- ▶ **Reject**: Touch  or .

Or:

- ▶ **Accept**: Enter device PIN ▶ Press  to confirm.
- ▶ **Yes**: Add to the **Known Devices** list or
- ▶ **No**: Use the device temporarily.

Changing the Bluetooth name of the handset

Menu key  ▶ **Settings** menu page ▶  **Bluetooth** ▶ **Own Device** (If Bluetooth is deactivated, it will be activated.) ▶ Touch the name ▶ If necessary, use  to delete the previous name ▶ Enter new name ▶ Touch  to confirm.

Continuing a handset call on the Bluetooth headset

Prerequisite: Bluetooth is activated; the Bluetooth headset and the handset are connected.

- ▶ Press the talk key on the headset.

It may take up to 5 seconds to establish a connection to the handset.

Use the side keys (→ page 1) to adjust the volume.

For further details about your headset, see the accompanying user guide.

Accepting a call on a Bluetooth headset

Prerequisite: Bluetooth is activated; the Bluetooth headset and the handset are connected.

Only press the talk key on the headset once the headset rings.

For further details about your headset, see the accompanying user guide.

Contacts (address book)

You can save up to four numbers, together with first names and surnames, eMail addresses, birthdays/anniversaries with signalling, VIP ringtone and caller picture in a **contacts entry**. You can synchronise the contacts with the Outlook contacts in your PC address book and upload ringtones and pictures to your handset (→ page 53).




You can create the contacts (with up to 500 entries) individually for each of your handsets. You can also send lists/entries to other handsets (→ page 41).

Length of the entries

4 numbers: Max. 32 digits each
First name and surname: Max. 16 characters each

Managing contacts entries

Opening the contacts


Menu key  ▶  **Contacts** or during a call depending on the situation
 or **Options** ▶ **Contacts**

Creating a new entry

- ▶ Open the contacts.
 - If no entries have been created
 - ▶ **New Entry**, otherwise
 - ▶ **Options** ▶ **New Entry**
 - ▶ Enter the components of each entry via the individual fields (name, number, eMail, birthday, ringtone, picture).

Where necessary, scroll down to see additional components.

To create an entry, you must enter at least one number.

Input in the **eMail** field: Pressing the  key multiple times allows you to enter frequently used characters: @. - 0 _

The first number in each entry is automatically highlighted in green (●). This number is used when you open the contacts entry and press the talk key.


Saving a contacts entry

- ▶ Touch **Save**.






Viewing an entry (detail view)

- ▶ Open contacts ▶ Touch the desired entry.

All the information relating to the entry is displayed.





Editing entries

- ▶ Touch .
- ◆ Change/delete first name, surname, number or eMail address: Touch the entry ▶ Where necessary, touch the relevant field ▶ Delete data by touching  ▶ Where necessary, enter new data ▶ Touch  to confirm. Touch  to exit the menu without saving.
- ◆ Delete a caller picture or ringtone assignment: Touch the relevant entry.
 - ▶ **No Picture/No Ringtone**
- ◆ Delete a birthday: Touch the **Birthday** field. ▶ 

Deleting an entry

- ▶ In the detail view: **Options** ▶ **Delete** ▶ Touch **Yes** to confirm.

Delete **all** contacts entries:

- Menu key**  ▶ **Settings** menu page ▶  **System** ▶ **Clean-up List** ▶ **Contacts**
 ▶ **Delete all contact entries** ▶ Touch **Yes** to confirm.

Displaying the number of entries that are still available in the contacts

- ▶ Open the contacts ▶ **Options** ▶ **Memory**

Defining the order of the contacts entries

You can define whether the entries are to be sorted by first name or surname.

Menu key  ▶  **Contacts** ▶ Press **First Name** or **Sort by Surname**.

If no name was entered, the number with the green dot is copied to the surname field. These entries appear at the beginning of the list, regardless of how the entries are sorted.

The sort order is as follows:

Space | Digits (0-9) | Letters (alphabetical) | Other characters.

Selecting a contacts entry, navigating in the contacts

If there are more than four entries in your contacts, a scroll bar appears on the right-hand side. You have the following options:

- ◆ Scroll to the name you are searching for.
- ◆ Enter the first letter of the name via the keypad. The letter appears in the header. The display jumps to the first name that begins with this letter. If necessary, scroll until you reach the desired entry.

Transferring an entry/contacts to another handset

Prerequisites:

- ◆ The sending and receiving handsets must both be registered to the same base.
- ◆ The other handset and the base can send and receive contacts entries.

You can transfer the entire contacts, an individual entry or multiple individual entries.

Please note

- ◆ An external call interrupts the transfer.
- ◆ Caller pictures and sounds are not transferred. For a birthday, only the date is transferred.
- ◆ When transferring an entry between two vCard handsets:
 - If the recipient does not yet have an entry with that name, a new entry is created.
 - If there is already an entry with that name, this entry is expanded with the new numbers.
 - Where there are more than eight numbers in total, a second entry is created with the same name.
- ◆ If the recipient is not a vCard handset: An entry is created and sent for each number.
- ◆ Your handset receives entries from a non-vCard handset: Entries with numbers already saved are rejected; otherwise a new entry is created.

Transferring individual entries

- ▶ Open the detail view for the entry (→ page 40) ▶ **Options** ▶ **Copy** ▶ **Internal Handset**
 - ▶ Select the recipient handset.

After a successful transfer:

- ▶ Touch **Yes** if another entry should be sent. Otherwise, touch **No**.

Transferring the entire contacts

- ▶ Open the contacts (→ page 40) ▶ **Options** ▶ **Copy List** ▶ **Internal Handset**
 - ▶ Select the recipient handset.



Transferring the contacts as a vCard with Bluetooth


Entire contacts:

Menu key  ▶  **Contacts** ▶ **Options** ▶ **Copy List**

Or:


Single entry:

Menu key  ▶  **Contacts** ▶ Open the detail view for the entry ▶ **Options** ▶ **Copy**

- ▶ Answer the prompt with **Bluetooth Device**. Bluetooth is activated, if necessary.
- ▶ Select the recipient from the **Known Devices** (→ page 39) list or touch **Search** and select the recipient from the **Devices Found** list. Enter the recipient's PIN and touch .


Receiving a vCard with Bluetooth

Prerequisite: The handset is in idle status. Bluetooth is activated.

- ▶ If the sender is in the **Known Devices** list (→ page 39), receipt occurs automatically.
- ▶ If the sender is not in the **Known Devices** list, enter the sender's device PIN and touch .
Following the vCard transfer, state whether the device should be added (**Yes**) to the **Known Devices** list or not (**No**).


Adding a displayed number to the contacts

You can copy to the contacts numbers that are displayed in a list, e.g. the call list, the redial list or in an SMS, as well as numbers that you have just dialled or entered for dialling.

- ▶ Touch the desired number. ▶ Touch  or **Options** ▶ **Save Number**.
 - ▶ **New Entry**: The number is copied as the first number of the entry with number type **Home**.
- Or:
 - ▶ Select the entry and
 - Add a number: ▶ Touch **Add**.
- Or:
 - Overwrite a number: ▶ Select the number you want to overwrite ▶ Touch **Yes**.

Copying a number from the contacts

In certain operating situations you can open the contacts to copy a number, e.g., to send an SMS or when you are dialling (even after you have entered a suffix).

- ▶ Depending on the operating situation, open the contacts with  or **Options** ▶ **Contacts**.
- ▶ Touch a contacts entry ▶ Touch the number you want to copy.

Configuring/selecting QuickDial


Prerequisite: The contacts must contain at least one number.

Menu key  ▶ **Settings** menu page ▶  **QuickDial** ▶ Touch the desired QuickDial key.

If no numbers have been saved:

- ▶ **Contacts open** ▶ **Select a number**.

If a number has been saved already:

- ▶ **Delete the number:** .

Or:

- ▶ **Change the number:** **Edit** ▶ **Contacts open** ▶ **Select a number**.

Select number: Press and hold the corresponding key in idle status.

Please note

If you change/delete a number from your contacts, the same number is automatically changed/deleted from the QuickDial list.

Call list

Your telephone stores various types of calls.

- Open the call list via the **messages page** (→ page 18) or **message pop-up** (→ page 18); open the **Missed Calls** list.

Or:

- Open the call list via the **Applications** menu page; open the **full list of all calls**.

You can switch between call lists:

- ◆ **Show all:** Full list of all calls (missed, outgoing, incoming)
- ◆ **Show by type ► Missed:** List of missed (unaccepted) calls
- ◆ **Show by type ► Accepted:** List of accepted calls and calls recorded by the answer machine (QD, Gigaset S820A only)
- ◆ **Show by type ► Outgoing:** List of outgoing calls (dialled numbers)

The last 20 entries are shown in the call list.

- **Open the detail view:** Touch the entry. The display shows all the available information. In the detail view, you can delete the entry or add the number to the contacts (→ page 43).


Call list (example)



Calendar

You can remind yourself of up to **30 appointments**. Birthdays in the contacts are transferred to the calendar.

The current date is highlighted in white in the calendar. Days with appointments are marked with a coloured bar. When you select a day, it is briefly highlighted in colour.



Saving appointments to the calendar

Prerequisite: the date/time has already been set (→ page 10).

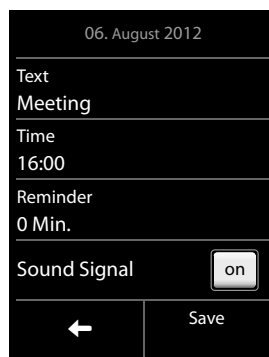
Menu key ▶ **Calendar**

- ▶ Set the month using / ▶ Touch the desired day
- ▶ **New Entry**

The following information can be added:

- **Text:** Name for the appointment (e.g., dinner, meeting).
- **Time:** Time (hour and minutes) for the appointment.
- **Reminder:** You can set a reminder for up to one week in advance of the appointment.
- **Sound Signal:** Use the key to activate/deactivate the sound signal.

- ▶ Touch **Save**.



Setting the tones and volumes of the reminder signal

Menu key ▶ **Settings** menu page ▶ **Audio Settings** ▶ **Reminder Signal**

- ▶ Set the volume using / or set increasing volume using the switch next to **Crescendo**.
- ▶ **Sound** ▶ Select the ringtone ▶ Go back with

Signalling appointments and birthdays

An appointment/birthday is displayed in idle status and signalled for 60 seconds with the selected ringtone and volume.

You can deactivate the reminder call and respond with an SMS:

- ▶ Touch **Off** to acknowledge and end the reminder call.

Or:

- ▶ Touch **Write SMS**. The SMS editor is opened.

When you are on the phone, a reminder call is indicated on the handset with a **single** advisory tone.



Displaying unacknowledged appointments/birthdays

The following appointments and birthdays are saved in the **Reminders / Events** list:

- ◆ The appointment/birthday reminder was not acknowledged.
- ◆ The appointment/birthday was signalled during a phone call.
- ◆ The handset was deactivated at the time of the appointment/birthday.

The last 20 entries are displayed.

The **Reminders / Events** list is displayed on the messages page (→ page 18) with an icon.




- ▶ **Open list:** Touch message key  to open the messages page, then touch .



Number of new
messages

Number of old entries

Showing/deleting stored appointments

- Menu key**  ▶  **Calendar** ▶ Touch the desired day to display the appointments list
 ▶ Touch the desired appointment ▶ Delete appointment  or select, edit and save the entry.

Delete all missed appointments:


- Menu key**  ▶ **Settings** menu page ▶  **System** ▶ **Clean-up List** ▶ **Appointments**
 ▶ **Delete all past appointments** ▶ Touch **Yes** to confirm.

Alarm

Prerequisite: the date/time has already been set (→ page 10).

You can activate/deactivate and set the alarm as follows:

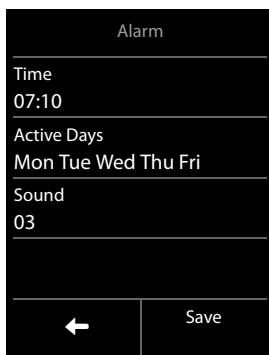
Menu key  **▶ Alarm ▶ on/off**

- ▶ Touch  to change the settings for the alarm:
 - **Time** ▶ Set the hour and minutes for the wake-up time (time setting → page 11)
 - **Active Days** ▶ Set the days when you want the alarm to ring
 - **Sound** ▶ Select a ringtone for the wake-up call
- ▶ Touch **Save** and confirm the security prompt.

A wake-up call is signalled in the display and with the selected ringtone for a maximum of 60 seconds. During a call, the wake-up call is only signalled by a short tone.

Please note

The wake-up call volume increases over time (fixed setting).



Deactivating the wake-up call/repeating after a pause (snooze mode)

Prerequisite: a wake-up call is sounding.

- ▶ **Switch off until next wake-up call:** Touch **Off**.

Or:

- ▶ **Snooze mode:**

Press **Snooze** or any key. The wake-up call is deactivated and then repeated after 5 minutes.

Or:

Do not press anything. The wake-up call is deactivated after 60 seconds and then repeated after 5 minutes. After the second repetition, the wake-up call is deactivated for 24 hours.

Baby phone

When the baby phone is switched on, the stored (internal or external) destination number is called as soon as a defined noise level is exceeded in the vicinity of the handset.

The baby phone call to an external number is cancelled after approximately 90 seconds. The talk key and menu keys are locked when the baby phone is activated. The handset's speaker can be switched on or off using the **Two Way Talk** function. If the intercom is activated, you can respond to the baby phone.

When baby phone mode is activated, incoming calls are only indicated on the display (**without a ringtone**). The display backlight is reduced to 50%. Advisory tones are deactivated.


If you accept an incoming call, the baby phone mode is suspended for the duration of the call, but the function **remains** activated. The baby phone is not deactivated by switching the handset off and on again.

Caution

- ◆ Please check the functionality when you switch on. For example, test its sensitivity. Check the connection if you are diverting the baby phone to an external number. Please note that the baby phone is only activated 20 seconds after being switched on.
- ◆ Activating the function reduces the operating time of your handset. If necessary, place the handset in the charger.
- ◆ The handset should be positioned 1 to 2 metres away from the baby. The microphone must be pointed towards the baby.
- ◆ No answer machine may be activated at the destination number.

Changing the settings

Menu key  ►  Baby Phone ► Set  ► Forward alarm to (Internal or External), Two Way Talk on/off, Sensitivity (High or Low) ► Save

- ◆ **Internal:** Select the internal handset from the list.
- ◆ **External:** Enter the destination number ► Confirm with .

Activating/deactivating the baby phone

► **Activate:** Menu key  ►  Baby Phone ► on

Or:



► **Deactivate:** Deactivate the switch on the idle display.

Cancelling/deactivating the baby phone call

To cancel a baby phone call: Press .

Deactivating the baby phone remotely

Prerequisite: The baby phone call is diverted to an external destination number. The recipient's phone supports tone dialling.

► Accept the baby phone call and press keys  .

The call is ended. The baby phone is deactivated and the handset is in idle status.

SMS (text messages)





The following prerequisites must be satisfied if you wish to use the SMS function.

Prerequisites:

- ◆ Calling Line Identification is enabled.
- ◆ Your network provider supports SMS within the fixed line network.
- ◆ You have entered the telephone number of at least one SMS centre (→ page 51).
- ◆ To receive SMS messages, you must be registered with your network provider.
This usually occurs automatically when you send your first text message.

Writing and sending text messages

Your system can send a **linked SMS** (made from up to four individual SMS messages) as one message. The messages are linked automatically.

- ▶ **Write SMS:** Menu key  ▶  **Write SMS** ▶ Touch the **To** field ▶ Enter recipient number with prefix ▶ Confirm with  ▶ Touch the **Message** field ▶ Enter SMS text (enter text and special characters, → page 19) ▶ Confirm with .
- ▶ **Send SMS:** Touch **Send**.

Please note

- ◆ If the SMS text cannot be displayed in full, you can scroll up and down within the text.
- ◆ You can move the cursor to any position within the text by touching the desired position.
- ◆ In the case of an external call, or if you interrupt writing by more than 3 minutes, the text is automatically saved in the draft message list. If the memory is full, the SMS is deleted.
- ◆ **Sending SMS messages can result in additional costs.** Please consult your provider.

Storing SMS messages temporarily (drafts list)

You can store SMS messages temporarily and then change and send them later.

- ▶ Touch  to end text input ▶ Touch **Save**.

Opening an SMS from the draft message list

Menu key  ▶  **Write SMS** ▶ **Drafts** ▶ Touch the entry in the drafts list.










You can delete the SMS () or continue writing ().


Receiving an SMS



Incoming SMS messages are saved in the inbox; linked SMS messages are, in general, displayed as **one** SMS.

Activating/deactivating first ringtone muting



Every incoming SMS is signalled by a single ring of the ringtone. If you accept such a "call" on the first ring, the SMS is lost. To prevent this, suppress the first ring for all external calls. In idle status:

Menu key         

You can see the current setting in the input field (e.g., 1). If you want to change this setting: delete with the  icon.

► If the first ringtone is to be muted:  

Or:

► If the first ringtone is **not** to be muted:  

SMS inbox

The inbox contains all the received SMS messages and any SMS messages that could not be sent due to an error.

If the SMS inbox contains messages (read or unread), the following icon appears on the message page (→ page 18):

► Touch the icon to open the SMS inbox.




Number of new SMS messages

Number of old SMS messages

Reading and managing SMS messages

► **Open the detail view:** Touch the SMS entry.

You have the following options:

► Press : Call the sender of the SMS.

Or:

► : Delete SMS.

Or:

► **Options**

► **Reply:** Write and send an SMS to the sender.

Or:

► **Edit:** Change the SMS text and send it to a recipient.

Or:

► **Save Number:** Store the number in the contacts.

SMS detail view (example)



Touch the sender or highlighted number in the message text:

Call the number or save in the contacts (→ page 43).

The number cannot be divided by a space. If it contains a special character (+ - / etc.), it is regarded as two numbers.

Deleting the **entire contents** of the SMS inbox or drafts list:

Menu key  **Settings** menu page  **System** **Clean-up List** **Messages**

► **Delete all received SMS**



Or:

► **Delete all SMS drafts**

► Touch **Yes** to confirm.

SMS centre

If you wish to use the SMS function, you must have saved the telephone number of at least one SMS centre in the device.

- ▶ **Check Active Send Centre:** ▶ Menu key  ▶ Menu page **Settings** ▶  **SMS**
 - ▶ **SMS Service Centres**

Ask your service provider for the telephone number of an SMS centre.

SMS messages are received from **every** entered SMS centre, as long as they are registered with their service provider. Your SMS messages are sent via the SMS service centre that is entered as the active send centre.

Entering/changing the SMS centre, setting the send centre

Menu key  ▶ **Settings** menu page ▶  **SMS** ▶ **SMS Service Centres** ▶ Enter the number of at least one SMS centre ▶ Touch  to confirm.

- ▶ If necessary, repeat the procedure for the other SMS centres.
- ▶ **Specify Active Send Centre:** Touch the number of the SMS centre (1–4) you wish to use as the send centre. For the SMS centres 2 to 4, the setting only applies to the next SMS.

Please note

If you have agreed a flat fixed line network rate with your network operator, the chargeable numbers with dialling code 0900 are often blocked. If, in this case, you enter a 0900 number for the SMS service centre, you will not be able to send text messages from your phone.











SMS on a PABX


- ◆ **Calling line identification** must be forwarded to the extension of the PABX (**CLIP**).
- ◆ If necessary, the access code must be prefixed to the number of the SMS centre (depending on your PABX).
Test: Send an SMS to your own number, once with the access code and once without the access code.
- ◆ If the SMS is sent without the extension number, it will not be possible for the recipient to answer directly.



Sending and receiving SMS on ISDN PABXs is only possible via the MSN number assigned to your base.

Activating/deactivating SMS function

If you deactivate this function, you cannot send or receive any further SMS messages with your phone. All the settings and the entries in the inbox and draft message list remain saved even after switching off.

Menu key  ▶    0  5   2  3  ▶ 

You can see the current setting in the input field (e.g., 1). If you want to change this setting: delete with the  icon.

- ▶ Deactivate the SMS function: ▶ 0  ▶ 

Or:

- ▶ Activate the SMS function (default): ▶ 1  ▶ 

SMS status report

When the function is activated, you will receive an SMS from your SMS centre containing status information for each SMS you send.

Menu key  ▶ **Settings menu page** ▶  **SMS** ▶ **Status Report on/off**

Please note

Querying the status report can result in additional costs. Please consult your provider.

SMS troubleshooting

E0	Calling Line Identification permanently restricted (CLIR) or Calling Line Identification not activated.
FE	Error occurred during SMS transfer.
FD	Connection to SMS centre failed, see self-help.

Self-help with errors

You cannot send messages.

1. You have not requested the CLIP service (Calling Line Identification Presentation).
 - ▶ Ask your network provider to enable the feature.
2. SMS transmission has been interrupted (e.g., by a call).
 - ▶ Re-send the text message.
3. The network provider does not support this feature.
4. No number or an incorrect one has been entered for the send centre.
 - ▶ Enter the number (➔ page 51).

You receive an incomplete SMS.

1. Your phone's memory is full.
 - ▶ Delete old SMS messages.
2. The network provider has not yet sent the rest of the message.

The SMS message is played back.

1. The "display call number" service is not activated.
 - ▶ Ask your network provider to enable this feature (there is a charge for this).
2. Your mobile phone operator and SMS service provider are not working together.
 - ▶ Obtain information from your SMS service provider.
3. The phone is not registered with the SMS service provider.
 - ▶ Send an SMS message to register your phone to receive SMS messages.

Synchronisation with your PC (Gigaset QuickSync)

You can:

- ◆ Synchronise your handset's contacts with your Google contacts online via the cloud
- ◆ Synchronise the contacts on your handset with your PC's Outlook contacts
- ◆ Load caller pictures to the handset from the PC
- ◆ Download pictures as a screensaver from the PC to the handset
- ◆ Download sounds (ringtones) from the PC to the handset
- ◆ Make outgoing calls and accept incoming calls. The display on the handset behaves in the same way as if the call were being handled directly on the handset.
- ◆ Update the firmware of your Gigaset S820 handset (via USB only)

You can save the following image and sound formats on your handset:

Sound	Format	Picture	Format
- Ringtones - Imported sounds	Internal WMA, MP3, WAV	- Caller photo - Screensaver	BMP, JPG, GIF 240 x 160 pixels 240 x 320 pixels

To enable your handset to communicate with a PC, the **"Gigaset QuickSync program (Version 7 or higher)" must be installed on your PC** (free download and more information at www.gigaset.com/gigaset820). You can use this program to create a connection between PC and handset) via Bluetooth (→ page 38) or USB (→ page 1).

Please note

- ◆ Firmware can only be updated via a USB connection.
- ◆ If the USB data cable is plugged in, a Bluetooth connection cannot be established. If it is plugged in during an existing Bluetooth connection, this is cancelled.





A detailed description can be found in the **Gigaset QuickSync** help file.

Connecting the base station to the PABX/router

Router operation

You can reduce the **echoes** that may occur when using the analogue connection of a router by activating **XES mode 1** *. You can activate **XES mode 2** if XES mode 1 does not sufficiently suppress the echoes.

The normal mode (default) should be activated if you do not experience any problems with echoes.

Menu key  ▶   0   7  0  ▶ Delete current setting:  ▶ 0 

▶  for Normal mode

Or:
▶ 1  for XES mode 1

Or:
▶ 2  for XES mode 2




Operation on a PABX

To find out which settings are required for your PABX, please refer to the PABX user guide.




You cannot send or receive SMS messages on PABXs that do not support Calling Line Identification.

Recall and dialling mode

Changing the dialling mode





Menu key  ▶ Settings menu page ▶  Telephony ▶ Dialling Mode
▶ Select tone dialling (Tone)/pulse dialling (Pulse) ( = set value)

Setting recall

Menu key  ▶ Settings menu page ▶  Telephony ▶ Recall
▶ Select flash time ( = set value)

Saving an access code (outside line code)

If you have to enter an access code before any external number on your PABX, e.g., "0":

Menu key  ▶ Settings menu page ▶  Telephony ▶ Access Code
▶ Code to access line ▶ Enter the access code (max. 3 digits) and touch  to confirm
▶ Use ( = selected):

▶ **Never:** Deactivate the access code.

Or:

▶ **Calls from Call Lists:** The access code should only be prefixed when dialling from a list (SMS, calls, answer machine (Gigaset S820A)).

Or:








▶ **All Calls:** The access code should be prefixed to every number.









* XES stands for "eXtended Echo Suppression".










Setting pauses

Menu key  ► * 0  ► 0  5  ► Then enter one of the following function codes:








◆ Pause after line seizure:










   ►  ► Delete current setting:  ►  ►  for 1 sec.

   ►  ► Delete current setting:  ►   ►  for 3 sec.

   ►  ► Delete current setting:  ►    ►  for 7 sec.







◆ Pause after R key:









   ►  ► Delete current setting:  ►  ►  for 800 ms









   ►  ► Delete current setting:  ►    ►  for 1600 ms









   ►  ► Delete current setting:  ►    ►  for 3200 ms

◆ Dialling pause (pause after access code):


  ►  ► Delete current setting:  ►  ►  for 1 sec.

  ►  ► Delete current setting:  ►    ►  for 2 sec.

  ►  ► Delete current setting:  ►    ►  for 3 sec.


  ►  ► Delete current setting:  ►    ►  for 6 sec.

Add dial pause during dialling:

Press and hold the R key . A P appears in the display.

Switching temporarily to tone dialling (Tone)

After dialling the external number or after establishing the connection ( is displayed):

► Briefly press the star key .








Or:




► Options ► Tone Dialling

Display icons

Options bar icons

The following functions are available in the options bar depending on the operating situation:

Icon	Action
	Return to the previous display.
	Mute handset microphone
 (orange)	Unmute handset microphone
	Open the call list
	Opening the contacts
	Save number to contacts
	Deleting













Icon	Action
	Save/select
	Edit entry, enter new appointment
	Divert call to answer machine










Please note

The menu icons can be found in the menu overview on page 58.

Icons in the status bar

The following icons are displayed in the status bar depending on the settings and the operating status of your telephone:

Icon	Meaning
	Signal strength (No Radiation off) 76%–100% 51%–75% 26%–50% 1%–25% White if Maximum Range is on Green if Maximum Range is off
	
	
	
	Red: no connection to the base
	No Radiation activated: White if Maximum Range is on; Green if Maximum Range is off
	Answer machine activated (S820A only)
	Bluetooth activated or
	Bluetooth headset/data device connected
	Ringtone deactivated
	"Beep" ringtone activated
	USB connection active

Icon	Meaning
	Battery charge status: White: charged over 66% White: charged between 34% and 66% White: charged between 11% and 33% Red: charged below 11% Flashing red: battery almost empty (approx. 5 minutes of talktime remaining)
	
	
	
	
	Battery charging (current charge status): 0%–10% 11%–33% 34%–66% 67%–100%
	
	
	

Signalling display icons



Establishing a connection (outgoing call)



Connection established



Connection cannot be established/connection terminated



Internal/external call



Alarm call



Birthday reminder call



Answer machine is recording



Reminder call for appointment

Other display icons



Information



(Security) prompt



Please wait...



Action complete (green)




Warning



Action failed (red)






Setting options

Open the **Settings** menu page:

- ▶ Briefly press **menu key**  when the handset is in idle mode.
- ▶ Touch **Settings** in the header.

Please note

Not all of the functions described in this user guide are available in all countries.

	Time		page 11
	Time Format	12 hrs/24 hrs	page 26
	Date		page 11
	Date Order	Day Month Year/Month Day Year	page 26
	Ringtones	Volume	page 25
		Crescendo	page 25
		Internal Calls	page 25
		External Calls	page 25
	Reminder Signal	Volume	page 45
		Crescendo	page 45
		Sound	page 45
	Advisory Tones	Confirmation	page 25
	Screensaver	Key Click	page 25
		Battery Warning	page 25
	Backlight	Activation	page 23
		Selection	page 23
		In Charger	page 23
	Display Language	Out of Charger	page 23
		Timeout	page 23
		AM Phrase Language (S820A)	page 23
		Country	page 32
	Area (Dial Code)	Language	page 23
		Location	page 23
		This Handset	page 36
		Register/De-register	page 35
		Registered Handsets	page 36
	Connect to Base	Base 1	page 36
		:	
		Base 4	
		Best Base	



ECO DECT	
Repeater Mode	
Security	
Resets	
Clean-up List	

Maximum Range	page 29
No Radiation	page 29
System PIN	page 27
Handset Reset	page 28
Base Reset	page 28
Appointments	page 19
Calls	page 19
Messages	page 19
Contacts	page 19



Time Control	
Anonymous Calls	
Black List	

Activation Mode	page 26
VIP Callers	page 26
Protection Mode	page 27
Blocked Numbers	page 27
Protection Mode	page 27



Key 2	
:	
Key 9	

page 43



Auto Answer	
Listening In	
Access Code	
Dialling Mode	
Recall	

Code to access line	page 24
Use	page 37
Pulse	page 54
Tone	page 54
80 ms/ .../800 ms	page 54



SMS Service Centres	
Status Report	

Active Send Centre	page 51
Service Centr. 1	
:	
Service Centr. 4	

page 52



Activation	
Search for Devices	
Known Devices	
Own Device	

page 38
page 38
page 39
page 39

Setting options



(Gigaset
S820A)

Activation Mode	
Announcements	
Recordings	
Call Screening	
Play Time Stamp	

Announcement Advisory Message Time Control	page 30 page 30
--	--------------------

Announcement Advisory Message	page 30
----------------------------------	---------

Recording Length Recording Quality Ring Delay	page 31
---	---------

page 30

page 30

page 30

page 31

page 31

page 31



Access Number	
Activate/Deactivate	

(dependent on your network provider.)	page 34 page 34
---------------------------------------	--------------------

page 34

page 34

Customer Service & Assistance

Do you have any questions? As a Gigaset customer, you can find help quickly in this User Manual and in the service section of our Gigaset online portal www.gigaset.com/service.

In our constantly updated online service you can find:

- ◆ Extensive information about our products
- ◆ FAQ compilations
- ◆ Keyword search to help find topics quickly
- ◆ Compatibility database: Find out which base stations and handsets can be combined.
- ◆ Product comparison: Compare the features of several products with each other.
- ◆ Downloads for user manuals and current software updates
- ◆ E-mail contact form for customer service

Please register your phone online right after purchase.

This enables us to provide you with even better service regarding questions or an after sales query/issue/claim. In order to contact our customer service via email, please use the email contact form from our Gigaset online portal after selecting your home country.

Our representatives are also available on the telephone hotlines for consultation.

Customer Service & Assistance

Australia	-----+61 1300 780 878	Jordan	-----00962 6 5625460/1/2
Austria	-----0043 1 311 3046	Kuwait	-----+965 -22458737/22458738
Bahrain	-----31 73 11 173	Lebanon	-----+9611240259/
Belgium	-----07815 6679	-----	-----+9611236110
Bosnia Herzegovina	-----033 276 649	Luxembourg	----- (+352) 8002 3811
Brazil		Malaysia	-----+603-8076 9696
Grandes Capitais e Regiões Metropolitanas:		Malta	-----+39 02360 46111 (0,10 €)
-----	4003 3020	Mexico	-----01800 999 4442738
(Prezzo de uma ligação local)		-----	----- (01800 999 GIGASET)
-----	Demais localidades:	Netherlands	-----0900-3333102
-----	-----0800 888 3020	New Zealand	-----0800 780 878
(Gratuito)		Norway	-----+47 2231 0845
Bulgaria	-----+359 2 9710666	Oman	-----+968 70928 Ext. 49/21/75
Canada	-----1-866 247-8758	Poland	-----801 140 160
China	-----0 21 400 670 6007 (RMB 0.11)	Portugal	----- (+351) 808 788 877
Croatia	-----01 / 2456 555	-----	----- (custo de uma chamada local)
Czech Republic	-----233 032 727	Romania	-----+40 021 204 9130
Denmark	-----+45 43682003	Russia	-----8-800 333 4956
Finland	-----+358 (0)9725 19734	Serbia	-----0800 222 111
France	-----+33 (0)157 324 522	Singapore	-----6735 9100
Germany	-----01805 333 222	Slovak Republic	-----044 5567 988 alebo
Greece	-----+30 2111 98 1778	-----	-----02 59682266
Hong Kong	-----2763 0203	Slovenija	-----01 5466 511
-----	-----2389 7285	South Africa	-----0800 98 08 42
Hungary	----- (06-1) 267 2109	Spain	-----902 103935
India	----- Please refer to your	Sweden	-----+46 (0)8502 52347
-----	----- local warranty card	Switzerland	-----0848 212 000
Indonesia	----- (62-21) 5673813	Taiwan	-----02 266 24343
-----	----- (62-21) 888856000	Turkey	-----+90 216 223 01 57
Ireland	-----+353 818 200 033	Ukraine	-----+380-44-451-71-72
Italy	-----199.15.11.15	United Arab Emirates	-----+97144458255
(€ cent 8,36 + IVA al minuto da telefono fisso		-----	-----+97144458254
della rete Telecom Italia senza scatto alla		United Kingdom	-----+44 84503 18190
risposta mentre per le chiamate effettuate		USA	-----1-866 247-8758
attraverso la rete di altri operatori fissi o mobili		-----	----- tollfree
consultate le tariffe del vostro operatore)			

Please have your record of purchase ready when calling. After sales service is not offered in countries where our product is not sold by authorised dealers.

Manufacturer warranty (Middle East)

On the purchase of your new Gigaset product, we guarantee that this equipment is a genuine manufacturer's product:

We guarantee this product against manufacturing defects for 1 year from the date of purchase, unless specified otherwise.

Adaptors and batteries for cordless phones carry 6 months warranty from the date of purchase.

Gigaset Communications authorized Service Centres will replace or repair, if necessary, any defective part/parts free of charge by presenting this certificate of warranty at the Service Centre mentioned overleaf.

This Certificate of warranty does not apply if the telephone has:

- ◆ Been misused, mishandled, wilfully damaged, neglected, damaged by lightning, improperly repaired, tested, altered improperly in any way.
- ◆ A defect arising out of any failure to follow instructions either in the manual or product specification.
- ◆ In case repairs are carried out of by unauthorised personnel or unauthorised source warranty will be void.
- ◆ A defect arising from using non-Gigaset approved accessories or ancillary items attached to or in connection with the telephone.
- ◆ If this certificate of warranty is not signed and stamped by the authorised distributor.
- ◆ Any other claim resulting out of or in connection with the device shall be excluded from this warranty.

For Southern Africa:

In the event of an after-sales issue/warranty claim please refer back to your point of purchase.

Proof of purchase (receipt) has to be submitted.

Certificate of warranty (Middle East)

The warranty is not valid if it is not signed and stamped by the authorized distributor.

Please fill in the following details and stamp the card to validate the warranty.

All details must be filled in by the dealer and retained by the customer.

This warranty shall apply to products purchased in the Middle East only.

Customer's Name:

Product / Model:

Dealer's Name:

Date of Purchase:

Invoice / Cash Memo Details:

Dealer's Stamp

Service Centres (Midde East)

UAE

Customer Service Hotline UAE

TEL: 00971-4-4458255 / 00971-4-4458254

Service Collection Point

www.technocare-prodigy.com

KARAMA

Sea Shell Electronics

Opp. Karama Centre

Dubai, UAE

Tel: 00971-4-3979228

Fax: 00971-4-3966205

Deira

Souvenir Mobiles,

Omar Bin Katab Road,

Oppst. Gulf Peral hotel (Tahir Hotel)

Al Baraha Street,

Tel: 00971-4-2731910 / 00971-4-2737377

Sharajah

Hotline Telecom

Sahara Centre

Sharjah, UAE

Tel: 00971-6-5312126

Al Ain

Phone Station

Al Ain Mall, Town Centre,

Tel: 00971-3-7515588

Fujairah

Al Manzil,

Al Gurfa Street,

Main market Road,

Tel: 00971-9-2233488

Oman

National Telephone Services Co. LLC

P.O. Box 2786 PC:112, Sultanate of Oman

Tel: +968-709281 Ext. 45/21/75

Fax: +968-791013

E-mail: isonts@omentel.net.om

Qatar

Modern Home,

51-East - Salwa Road,

Al-Maha Complex, Doha

Tel: 00974-4257844 / 00974-4257777

Fax: 00974-4314700

Bahrain

Authorized Service Center,

Bldg: 211, Rd: 339, Block: 321,

Old Place Road, Manama,

Tel: 00973-17311173

E-mail: servicemanager@ashrafs.com.bh

Saudi Arabian Service Centers:

Ahmed Abdulwahed Trading Co.

Jeddah Service Center

Al-Amal Plaza, Hail Street,
Jeddeh, Saudi Arabia,
Tel: 02-6500282 Ext. 209

Riyadh Service Center

Olaya Street
Riyadh, Saudi Arabia,
Tel: 01-4622470 / 4623850

Khobar Service Centre

Al-Khobar Street,
Al-Khobar, Saudi Arabia,
Tel: 03-8944193/03-8952359

Madina Munawara

Al-Ayon Street,
Tel: 00966-4-8387931

Khamis Mushyat

Al-Khalidiya St.,
Tel: 00966-7-2230772

Tabuk

Main Street,
Tel: 00966-4-4219232

Kuwait

Customer Service Hotline Kuwait

Tel: 00965-22458737 / 00965-22458738

Al-Baptain Service Center

Shop #: 247
Qibla, Block 11,
Avenue 11,
Souk al Kabeer,
Fahad Al Salem Street,
Tel: 00965-2464993

Jordan

SEDR Home & office Electronics

Co - Tronicom
Wasfi Al-Tal St.,
Building No. 80,
2nd floor,
Tel: 00962-6-5625460/1/2

Lebanon



306, Jdeideh Sin el Fil Blvd,
Tel: 00961-1240259 / 00961-1236110

Questions and answers

If you have any queries about the use of your telephone, suggested solutions are available on the Internet at www.gigaset.com/service

► FAQ ► First steps for troubleshooting.

The table below also lists steps for troubleshooting.

<p>Registration or connection problems with a Bluetooth headset.</p> <ul style="list-style-type: none"> ► Reset the Bluetooth headset (see the user guide for your headset). ► Delete registration data from the handset when de-registering the device (→ page 39). ► Repeat the registration process (→ page 38).
<p>There is nothing on the display and the display does not react when you touch it.</p> <ol style="list-style-type: none"> The handset is not activated. <ul style="list-style-type: none"> ► Press and hold . The battery is flat. <ul style="list-style-type: none"> ► Charge or replace the battery (→ page 8). The keypad and display lock is activated. <ul style="list-style-type: none"> ► Press the hash key  and hold.
<p>"Base connection lost - Searching for base ..." flashes on the display.</p> <ol style="list-style-type: none"> The handset is outside the range of the base. <ul style="list-style-type: none"> ► Move the handset closer to the base. The base is not activated. <ul style="list-style-type: none"> ► Check the base power adapter (→ page 7). The base's range is reduced because Eco Mode is activated. <ul style="list-style-type: none"> ► Deactivate ECO DECT (→ page 29) or reduce the distance between the handset and the base.
<p>"Handset not registered to any base" flashes on the display.</p> <p>The handset has not yet been registered or was de-registered due to the registration of an additional handset (more than six DECT registrations).</p> <ul style="list-style-type: none"> ► Register the handset again (→ page 35).
<p>The handset does not ring.</p> <ol style="list-style-type: none"> The ringtone is deactivated. <ul style="list-style-type: none"> ► Activate the ringtone (→ page 25). The phone does not ring if the caller has withheld his number. <ul style="list-style-type: none"> ► Activate the ringtone for unknown calls (→ page 27). Phone does not ring during a specific period or for certain unknown numbers. <ul style="list-style-type: none"> ► Check time control for external calls (→ page 26) and blacklist (→ page 27).
<p>You cannot hear a ringer/dialling tone from the fixed line.</p> <p>The phone cord supplied has not been used or has been replaced by a new cord with the wrong pin connections.</p> <ul style="list-style-type: none"> ► Please always use the phone cord supplied or ensure that the pin connections are correct when purchasing from a retailer (→ page 71).
<p>The connection always terminates after approx. 30 seconds.</p> <p>Repeater activated/deactivated (→ page 27).</p> <ul style="list-style-type: none"> ► Switch the handset off and back on again (→ page 16).
<p>Error tone sounds after system PIN prompt.</p> <p>You have entered the wrong system PIN.</p> <ul style="list-style-type: none"> ► Repeat the process, if necessary reset the system PIN to 0000 (→ page 28).

Forgotten system PIN.

- ▶ Reset the system PIN to 0000 (→ page 28).

The other party cannot hear you.

The handset is "muted".

- ▶ Unmute the microphone (→ page 22).

The caller's number is not displayed.

1. **Calling Line Identification (CLI)** is not enabled for the caller.
 - ▶ The **caller** should ask his network provider to enable Calling Line Identification (CLI).
2. **Calling line display (CLIP)** is not supported by the network provider or has not been enabled for you.
 - ▶ Have calling line display (CLIP) enabled by your network provider.
3. Your telephone is connected via a PABX or a router with an integrated PABX (gateway) that does not transmit all information.
 - ▶ Reset the system: Briefly pull out the power plug. Reinsert the plug and wait until the device restarts.
 - ▶ Check the settings on the PABX and activate phone number display, if necessary. To do this, search for terms such as CLIP, calling line identification, phone number identification, caller ID etc. in the system's user guide or ask the system manufacturer.

You hear an error tone when keying an input.

Action has failed/invalid input.

- ▶ Repeat the process.
- ▶ Read the display and refer to the user guide if necessary.

You cannot listen to messages on the network mailbox.

Your PABX is set to pulse dialling.

- ▶ Set your PABX to tone dialling.

Gigaset S820A only:**No time is specified for a message in the call list.**

Date/time are not set.

- ▶ Set the date/time (→ page 10).

The answer machine announces "PIN is incorrect" during remote operation.

1. You have entered the wrong system PIN.
 - ▶ Enter the system PIN again.
2. The system PIN is still set to 0000.
 - ▶ Set the system PIN to something other than 0000 (→ page 28).

The answer machine is not recording any messages/has switched to the advisory message.

The memory is full.

- ▶ Delete old messages.
- ▶ Play back new messages and delete.

Authorisation

This device is intended for analogue phone lines outside the European Economic Area (with the exception of Switzerland) depending on national type approval.

Country-specific requirements have been taken into consideration.

We, Gigaset Communications GmbH, declare that this device meets the essential requirements and other relevant regulations laid down in Directive 1999/5/EC.

A copy of the Declaration of Conformity is available at this Internet address:

www.gigaset.com/docs



Exclusion of liability

Your handset's display has a resolution of 240x320 pixels. Each pixel consists of three subpixels (red, green, blue).

It may be the case that a pixel is incorrectly controlled or has a colour deviation. **This is normal and no reason for a warranty claim.**

The following table shows the number of pixel errors that may occur without leading to a warranty claim.

Description	Maximum number of permitted pixel errors
Colour illuminated subpixels	1
Dark subpixels	1
Total number of coloured and dark subpixels	1

Please note

Signs of wear on the display and housing are excluded from the warranty.

Environment

Our environmental mission statement

We, Gigaset Communications GmbH, bear social responsibility and are actively committed to a better world. Our ideas, technologies and actions serve people, society and the environment. The aim of our global activity is to secure sustainable life resources for humanity. We are committed to a responsibility for our products that comprises their entire life cycle. The environmental impact of products, including their manufacture, procurement, distribution, utilisation, service and disposal, are already evaluated during product and process design.

Further information on environmentally friendly products and processes is available on the Internet at www.gigaset.com.

Environmental management system



Gigaset Communications GmbH is certified pursuant to the international standards ISO 14001 and ISO 9001.

ISO 14001 (Environment): Certified since September 2007 by TÜV SÜD Management Service GmbH.

ISO 9001 (Quality): Certified since 17/02/1994 by TÜV SÜD Management Service GmbH.

Disposal

Batteries should not be disposed of in general household waste. Observe the local waste disposal regulations, details of which can be obtained from your local authority.

All electrical and electronic equipment must be disposed of separately from general household waste using the sites designated by local authorities.



If a product displays this symbol of a crossed-out rubbish bin, the product is subject to European Directive 2002/96/EC.

The appropriate disposal and separate collection of used equipment serve to prevent potential harm to the environment and to health. They are a precondition for the re-use and recycling of used electrical and electronic equipment.

For further information on disposing of your used equipment, please contact your local authority or your refuse collection service.

Appendix

Care

Wipe the device with a **damp** cloth or an antistatic cloth. Do not use solvents or microfibre cloths.

Never use a dry cloth; this can cause static.

In rare cases, contact with chemical substances can cause changes to the device's exterior. Due to the wide variety of chemical products available on the market, it was not possible to test all substances.

Impairments in high-gloss finishes can be carefully removed using display polishes for mobile phones.

Contact with liquid

If the device comes into contact with liquid:

- 1 Disconnect the power supply.
- 2 Remove the batteries and leave the battery compartment open.
- 3 Allow the liquid to drain from the device.
- 4 Pat all parts dry.
- 5 Place the device in a dry, warm place **for at least 72 hours (not in a microwave, oven etc.)** with the battery compartment open and the keypad facing down (if applicable).
- 6 Do not switch on the device again until it is completely dry.

When it has fully dried out, you will normally be able to use it again.

Specifications

Battery

Technology: 2 x AA NiMH
Voltage: 1.2 V
Capacity: 1300 mAh

Handset operating times/charging times

The operating time of your Gigaset depends on the capacity and age of the battery and the way it is used. (All times are maximum possible times.)

Standby time (hours) *	250
Standby time in Eco mode+ (hours) *	180
Talktime (hours)	20
Operating time for 1.5 hours of calls per day (hours) *	165
Operating time in Eco mode+ for 1.5 hours of calls per day (hours) *	105
Charging time in base (hours)	9,5
Charging time in charger (hours)	14,5

* **Without** display backlight

Information about the USB port

- ◆ The handset's battery is charged using a USB connection with a power supply of 500 mA.
- ◆ On USB connections with lower charging currents, the consumption of the handset itself may be greater than the recharging. In this case the battery charge decreases.

Base power consumption

	S820	S820A
In standby mode		
- Handset in charger	Approx. 1.2 W	Approx. 1.2 W
- Handset outside charger	Approx. 0.55 W	Approx. 0.65 W
During a call	Approx. 0.65 W	Approx. 0.75 W

General specifications


DECT

DECT standard	Supported
GAP standard	Supported
No. of channels	60 duplex channels
Radio frequency range	1880-1900 MHz
Duplex method	Time division multiplexing, 10 ms frame length
Repeat frequency of the transmission pulse	100 Hz
Length of the transmission pulse	370 μ s
Channel grid	1728 kHz
Bit rate	1152 kbit/s
Modulation	GFSK
Language code	32 kbit/s
Transmission power	10 mW average power per channel, 250 mW pulse power
Range	Up to 50 m in buildings, up to 300 m outdoors
Base power supply	230 V ~/50 Hz
Ambient conditions for operation	+5°C to +45°C, 20% to 75% relative humidity
Dialling mode	DTMF (tone dialling)/PD (pulse dialling)

Bluetooth

Radio frequency range	2402-2480 MHz
Transmission power	4 mW pulse power

Pin connections on the telephone jack



Character set tables

Standard characters

Press the relevant key the number of times indicated.

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x
1	1									
2	a	b	c	2	ä	á	à	â	ã	ç
3	d	e	f	3	ë	é	è	ê		
4	g	h	i	4	ï	í	ì	î		
5	j	k	l	5						
6	m	n	o	6	ö	ñ	ó	ò	ô	õ
7	p	q	r	s	7	ß				
8	t	u	v	8	ü	ú	ù	û		
9	w	x	y	z	9	ÿ	ý	æ	ø	å
0		-	.	0						

1) Space

Arabic

Press the relevant key the number of times indicated.

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x	11x	12x
1	٠											
2	ب	پ	ت	ة	ث	٢	a	b	c			
3	ا	إ	أ	آ	و	ى	ع	٣	d	e	f	
4	س	ش	ص	ض	٤	g	h	i				
5	د	ذ	ر	ز	٥	j	k	l				
6	ج	چ	ح	خ	٦	m	n	o				
7	ن	ه	و	ي	ى	٧	p	q	r	s		
8	ف	ق	ك	گ	ل	م	٨	t	u	v		
9	ط	ظ	ع	غ	٩	w	x	y	z			
0		-	.	0		.						

1) Space

Persian

Press the relevant key the number of times indicated.

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x	11x	12x
1	٠											
2	ب	پ	ت	ة	ث	٢	a	b	c			
3	ا	إ	أ	آ	و	ى	ع	٣	d	e	f	
4	س	ش	ص	ض	٤	g	h	i				
5	د	ذ	ر	ز	٥	j	k	l				
6	ج	چ	ح	خ	٦	m	n	o				
7	ن	ه	و	ي	ى	٧	p	q	r	s		
8	ف	ق	ك	گ	ل	م	٨	t	u	v		
9	ط	ظ	ع	غ	٩	w	x	y	z			
0		-	.	0		.						

1) Space

Accessories

Upgrade your Gigaset to a cordless PABX:

Gigaset S820H handset

- ◆ Brilliant sound quality in handsfree mode
- ◆ Illuminated keypad
- ◆ Side key for simple volume control
- ◆ 2.4" touchscreen
- ◆ Bluetooth® and mini USB
- ◆ Contacts capacity for 500 vCards
- ◆ Talk/standby time of up to 20 h/250 h, standard batteries
- ◆ Brilliant sound quality in speaker mode:
 - 4 adjustable handsfree profiles
- ◆ Caller pictures, screensaver (analogue and digital clock)
- ◆ Download ringtones
- ◆ ECO-DECT
- ◆ Alarm
- ◆ Calendar with appointment scheduler
- ◆ Night mode with time-controlled ringtone deactivation
- ◆ Protection from "anonymous" callers
- ◆ Blacklist for 15 unwanted phone numbers
- ◆ Baby phone, direct call
- ◆ SMS with up to 640 characters

www.gigaset.com/gigasets820h



Gigaset SL910H handset

Full compatibility only available with firmware update (from version 70) approx. November/December 2012.

- ◆ Innovative touchscreen operating concept
- ◆ Handset with real metal frame
- ◆ 8.1 cm TFT colour display
- ◆ Brilliant sound quality in handsfree mode
- ◆ Bluetooth® and mini USB
- ◆ Individual menu configuration
- ◆ Contacts capacity for 500 vCards
- ◆ Talk/standby time of up to 13 h/180 h
- ◆ Brilliant sound quality in speaker mode:
4 adjustable handsfree profiles
- ◆ Caller pictures, screensaver (analogue and digital clock)
- ◆ Download ringtones
- ◆ ECO-DECT
- ◆ Alarm
- ◆ Calendar with appointment scheduler
- ◆ Night mode with time-controlled ringtone deactivation
- ◆ Protection from "anonymous" callers
- ◆ Baby phone
- ◆ SMS with up to 640 characters

<http://www.gigaset.com/gigasetSL910h>



Gigaset SL400H handset

- ◆ Real metal frame
- ◆ High-quality keypad with backlight
- ◆ 1.8" TFT colour display
- ◆ Bluetooth® and mini USB
- ◆ Contacts capacity for 500 vCards
- ◆ Talk/standby time of up to 14 hours/230 hours
- ◆ Large font for call lists and contacts
- ◆ Brilliant sound quality in speaker mode:
4 adjustable handsfree profiles
- ◆ Caller pictures, slideshow and screensaver (analogue and digital clock)
- ◆ Silent alert, download ringtones
- ◆ ECO-DECT
- ◆ Alarm
- ◆ Calendar with appointment scheduler
- ◆ Night mode with time-controlled ringtone deactivation
- ◆ Protection from "anonymous" callers
- ◆ Baby phone, direct call
- ◆ SMS with up to 640 characters

www.gigaset.com/gigasetSL400h



Gigaset S810H handset

- ◆ Brilliant sound quality in handsfree mode
- ◆ High-quality keypad with backlight
- ◆ Side key for simple volume control
- ◆ 1.8" TFT colour display
- ◆ Bluetooth® and mini USB
- ◆ Contacts capacity for 500 vCards
- ◆ Talk/standby time of up to 13 h/180 h, standard batteries
- ◆ Large font for call lists and contacts
- ◆ Brilliant sound quality in speaker mode:
4 adjustable handsfree profiles
- ◆ Caller pictures, screensaver
(analogue and digital clock)
- ◆ Download ringtones
- ◆ ECO-DECT
- ◆ Alarm
- ◆ Calendar with appointment scheduler
- ◆ Night mode with time-controlled ringtone deactivation
- ◆ Protection from "anonymous" callers
- ◆ Baby phone, direct call
- ◆ SMS with up to 640 characters

www.gigaset.com/gigaset810h



Gigaset C610H handset

- ◆ Social life management with baby phone and birthday reminders
- ◆ Individual programming of ringtones with 6 VIP groups
- ◆ High-quality keypad with backlight
- ◆ 1.8" TFT colour display
- ◆ Contacts capacity for 150 vCards
- ◆ Talk/standby time of up to 12 h/180 h, standard batteries
- ◆ Large font for call lists and contacts
- ◆ Brilliant sound quality in handsfree mode
- ◆ Screensaver (digital clock)
- ◆ ECO-DECT
- ◆ Alarm
- ◆ Night mode with time-controlled ringtone deactivation
- ◆ Protection from "anonymous" callers
- ◆ Baby phone, direct call
- ◆ SMS with up to 640 characters

www.gigaset.com/gigasetc610h



L410 handsfree clip for cordless phones

- ◆ Complete freedom of movement when making calls
- ◆ Practical clip fastening
- ◆ Perfect sound quality in handsfree mode
- ◆ Simple call pickup from handset
- ◆ Weight approx. 30 g
- ◆ ECO-DECT
- ◆ 5 volume settings
- ◆ LED status display
- ◆ Talk/standby time of up to 5 h/120 h
- ◆ Ranges in buildings up to 50 m, outdoors up to 300 m



www.gigaset.com/gigasetl410

ZX600 Bluetooth headset

- ◆ Supports Bluetooth® 2.0 (headset and handsfree profile)
- ◆ Perfect voice quality
- ◆ Optimal wear comfort
- ◆ Weight approx. 15 g
- ◆ Talktime up to 7 h

www.gigaset.com/gigasetzx600



Gigaset repeater

The Gigaset repeater can be used to increase the reception range between your Gigaset handset and the base.

www.gigaset.com/gigasetrepeater



Compatibility

You can find more information about the handset functions in connection with the individual Gigaset bases at:

www.gigaset.com/compatibility

All accessories and batteries are available from your phone retailer.



Use only original accessories. This will avoid possible health risks and personal injury, and also ensure that all the relevant regulations are complied with.

Index

- A**
- Access code (PABX) 54
 - Accessories 73
 - Activate/deactivate the function 17
 - Activating
 - answer machine 30
 - answer machine (remote operation) ... 32
 - muting ringtone 50
 - two-way recording 32
 - Activating/deactivating the crescendo tone
 - ringtone 25
 - Advisory message 30
 - Advisory tones 25
 - Alarm 47
 - Alert tone 25
 - Anniversary, see Birthday
 - Announcement (answer machine) 30
 - Anonymous call off 27
 - Answer machine 30
 - activating/deactivating 30
 - deleting individual messages 31
 - playing back messages 31
 - recording 32
 - recording a personal announcement/
 - advisory message 30
 - remote operation 32
 - setup 30
 - skip-back function 32
 - time control 30
 - Appointment
 - displaying missed 46
 - setting 45
 - Area code
 - setting own area code 23
 - Area code - prefix 12
 - Authorisation 68
 - Auto answer 24
- B**
- Baby phone 48
 - Back function 18
 - Backlight timeout, display 23
 - Backlight, display 23
 - Base
 - changing 35
 - changing name 35
 - changing settings 23
 - changing system PIN 28
 - connecting to PABX 54
 - connecting to power/telephone
 - network 7
 - connecting to router 54
 - deleting 35
 - resetting 28
 - restoring default settings 28
 - setting 10
 - setting up 6
 - wall mounting 7
 - Battery
 - charging 9
 - charging status 56
 - inserting 8
 - warning 25
 - Best base 35
 - Birthday 40
 - displaying missed 46
 - missed 46
 - Blacklist 27
 - Bluetooth
 - accepting call 39
 - activating 38
 - changing device name 39
 - ending a search 39
 - list of known devices 39
 - registering devices 38
 - starting a search 38
 - transferring contacts (vCard) 42
 - transferring vCards 42

C	
Calendar	45
Call	
accepting	21
accepting (Bluetooth)	39
answer automatically	24
diverting (ans. mach.)	32
external	20
internal	36
internal transfer (connecting)	37
participant listening in	37
picking up from answer machine	32
recording	32
redirecting (ans. mach.)	32
transferring (connecting)	37
transferring internally (connecting)	37
Call list	44
Call protection	26
Call screening during recording (ans. mach.)	31
Call swapping internal/external call	37
Caller picture	40, 41
Calling	
external	20
internal	36
Calling Line Identification	22
Care	70
Care of the device	70
Changing	
device name (Bluetooth)	39
handset name	36
system PIN	28
telephone settings	23
Changing settings user interface elements	17
Character set tables	72
Charger (handset)	
connecting	7
setting up	6
Charging time of handset	70
CLIP	22
Cloud synchronisation	14, 53
Conference	
ending	37
internal/external call	37
Connecting to base	35
Consultation call	
internal	37
Contact with liquid	70
Contacts	40
copying number from text	43
managing entries	40
order of entries	41
saving entry	40
sending entry/list to handset	41
sending to handset	41
sending vCards with Bluetooth	42
transferring a vCard (Bluetooth)	42
transferring vCards with Bluetooth	42
using to enter numbers	43
Correcting incorrect entries	18
Customer Care	61
Customer Service & Assistance	61
D	
Date + time	26
Date order	26
Deactivating	
answer machine	30
baby phone	48
muting ringtone	50
two-way recording	32
Deleting	
announcement for answer machine	30
De-registering (handset)	36
Destination number (baby phone)	48
Dialling	
using the call list	20
using the redial list	20
via contacts	21
Dialling mode	54
Dialling pause	55
Directory, see Contacts	
Display	
activating the backlight	23
activating/deactivating new messages	24
backlight	23
contacts memory	41
network mailbox message	34
number (CLI/CLIP)	22
screensaver	23
setting	23
timeout for backlight	23
Display icons	56
Display lock	
activating/deactivating	16
Displaying	
missed appointments/birthdays	46

Disposal	69
Diverting a call	
to answer machine	32
Dot, green	20, 21
Draft message list (SMS)	49

E

Earpiece mode	22
Earpiece volume	22
Echo	54
ECO DECT	29
Eco mode+ (switching off wireless module)	29
End call/end key	1, 20
End key, see End call/end key	
Entering special characters	19
Entering text	18
Entering umlauts	19
Environment	69
Exclusion of liability	68
External call	
internal transfer (connecting)	37
External calls	
time control for ringtone	26
External line code (PABX)	54

G

Getting started	6
Gigaset QuickSync	53
Green dot	20, 21
Group call	36

H

Handset	
activating/deactivating	16
advisory tones	25
changing name	36
changing settings	23
changing to best reception	35
changing to different base	35
connecting charger	7
de-registering	36
display backlight	23
display language	23
earpiece volume	22
idle status	16
in idle status	13
muting	22
paging	36

registering	35
registering another Gigaset	35
registering to different base	35
reset	28
restoring to default settings	28
screensaver	23
searching for	36
setting	10, 23
setting up	8
speaker volume	22
transferring a call	37
using it as a baby phone	48
using multiple	35
Handset + base	35
Handset operating time	
in baby phone mode	48
Handsfree volume	22
Headset (Bluetooth)	
accepting a call	39
Hearing aids	4
Help	66

I

Icons	
options bar	56
status bar	56
Idle status	
handset	13
returning to	16
Inbox (SMS)	50
Incorrect entry correction	18
Installation wizard	10
Internal	
listening in	37
making calls	36
Internal call	36
Internal consultation call	37

K

Keypad lock	
activating/deactivating	16
Keypad/display lock on/off	1, 16
Keys	
end call/end key	1, 20
handset	1
menu key	1
paging key (base)	2
talk key	1

- L**
- Language + region 15, 23
 - Liquid 70
 - List
 - accepted calls 44
 - call list 44
 - cleaning up 31, 41, 46, 50
 - known devices (Bluetooth) 39
 - missed calls 44
 - outgoing calls 44
 - SMS draft message list 49
 - SMS incoming list 50
 - Listening in on an external call 37
 - Lock
 - activating/deactivating 16
 - Lower/upper case 19
- M**
- Making calls
 - accepting a call 21
 - external 20
 - internal 36
 - Manufacturer warranty (Middle East) 63
 - Marked characters 19
 - Medical equipment 4
 - Melody
 - ringtone for internal/external calls 25
 - Memory space in contacts 41
 - Menu key 1
 - Menu tree 58
 - Message LED
 - activating/deactivating 24
 - Message length (ans. mach.) 31
 - Mini USB connection socket 1
 - Missed birthdays/appointments 46
 - Missed calls 44
 - Mounting the base on the wall 7
 - Music on hold 27
 - Muting the first ring 50
 - Muting the handset 22
- N**
- Network mailbox 34
 - Number
 - as destination for baby phone 48
 - copying to contacts 43
 - displaying caller's number (CLIP) 22
 - entering with contacts 43
 - saving in contacts 40
 - Numbers
 - entering 18
- O**
- One touch call 21
 - Opening the submenu 18
 - Operating remotely 32
 - Operating time of handset 70
 - Options 18
 - Options bar 18
 - icons 56
 - Order in contacts 41
 - Outside line code 54
- P**
- PABX
 - connecting base 54
 - pauses 55
 - saving access code 54
 - setting dialling mode 54
 - setting recall 54
 - SMS 51
 - switching to tone dialling 55
 - Package contents 6
 - Paging 2, 36
 - Paging key 2
 - Pause
 - after access code 55
 - after line seizure 55
 - after recall key 55
 - PC Interface 53
 - PD (pulse dialling) 54
 - Phone
 - operating 16
 - restoring to factory settings 28
 - setting 23
 - Phone number display, notes 22
 - Pin connections 71
 - PIN, changing 28
 - Playing back
 - announcement (answer machine) 30
 - message (answer machine) 31
 - Playing back messages (ans. mach.) 31
 - Power adapter 4
 - Power consumption 71
 - Prefix for area code 12
 - Pulse dialling 54
- Q**
- Questions and answers 66
 - QuickDial
 - configuring 43
 - QuickSync 53

- R**
- Range 6
 - reducing 29
 - Recall 54
 - Recall key 55
 - Reception booster, see Repeater
 - Recording
 - announcements (ans. mach.) 30
 - two-way recording 32
 - Recording (ans. mach.) 32
 - Recording quality (ans. mach.) 31
 - Redirecting (ans. mach.) 32
 - Reducing radiation 29
 - Reducing transmission power 29
 - Registered handsets 36
 - Registering (handset) 35
 - Registering device (Bluetooth) 38
 - Registering other Gigaset handsets 35
 - Repeater 27
 - Reset
 - base 28
 - handset 28
 - Ring delay 31
 - Ring tone
 - muting first ring 50
 - Ringtone
 - activating/deactivating crescendo
 - tone 25
 - changing 25
 - deactivating for anonymous calls 27
 - melody for internal/external calls 25
 - muting 50
 - time control for external calls 26
 - Router
 - connecting base station 54
 - Rubber seal 8

S

 - Safety precautions 4
 - Screensaver 23
 - Searching
 - Bluetooth devices 38
 - handset 36
 - in contacts 41
 - Selecting entry from contacts 41
 - Selection fields 18
 - Sending
 - complete contacts to handset 41
 - contacts entry to handset 41
 - SMS 49
 - Service Centres (Midde East) 64
 - Setting
 - area code 10
 - country 10
 - date 10
 - display language 10, 23
 - time 10
 - Setting up, handset 8
 - Settings options
 - answer machine 30
 - telephone 23
 - Signal strength 56
 - Signal tone, see Advisory tones
 - Skip-back function (ans. mach.) 32
 - SMS 49
 - active send 51
 - buffering 49
 - deleting 50
 - draft message list 49
 - incoming list 50
 - reading 50
 - receiving 50
 - self help with error messages 52
 - to PABXs 51
 - troubleshooting 52
 - writing/sending 49
 - SMS centre 51
 - changing number 51, 52
 - Snooze mode (alarm) 47
 - Sound, see Ringtone
 - Speaker 22
 - Speaker profile 24
 - Special functions 54
 - Specifications 70
 - Status bar 1
 - icons 56
 - Switch 17
 - Switching off
 - internal listening in 37
 - wireless module 29
 - Switching on/off
 - microphone (handset) 22
 - Synchronising contacts 14, 53
 - Synchronising Google contacts 14, 53
 - System PIN
 - changing 28
 - resetting 28

- T**
- Talk key 1
 - Telephone jack, pin connections 71
 - Text message, see SMS
 - 3-way conference
 - ending 37
 - internal/external call 37
 - Time control
 - answer machine 30
 - ringtone for external calls 26
 - Time format 26
 - Time, setting 10
 - Timeout for display backlight 23
 - Tone dialling 54, 55
 - Tones + signals 25, 26, 27
 - Touchscreen 1
 - operating 17
 - Transferring an external call internally 37
 - Troubleshooting
 - general 66
 - SMS 52
- U**
- Unavailable 22
 - Updating
 - firmware 53
 - Updating the handset firmware
 - (Gigaset QuickSync) 53
 - Upper/lower case 19
 - USB connection socket 1
 - USB connection, rubber seal 8
 - User interface elements 17
 - Using the redial list 20
- V**
- vCard
 - receiving with Bluetooth 42
 - sending with Bluetooth 42
 - Viewing network mailbox message 34
 - VIP ringtone 40, 41
 - Volume
 - handsfree/earpiece volume
 - of handset 22
- W**
- Warning tone, see Advisory tones
 - Withheld 22
 - Writing (SMS) 49
- X**
- XES mode 54

Issued by

Gigaset Communications GmbH
Frankenstr. 2a, D-46395 Bocholt

© Gigaset Communications GmbH 2012

Subject to availability.

All rights reserved. Rights of modification reserved.

www.gigaset.com