
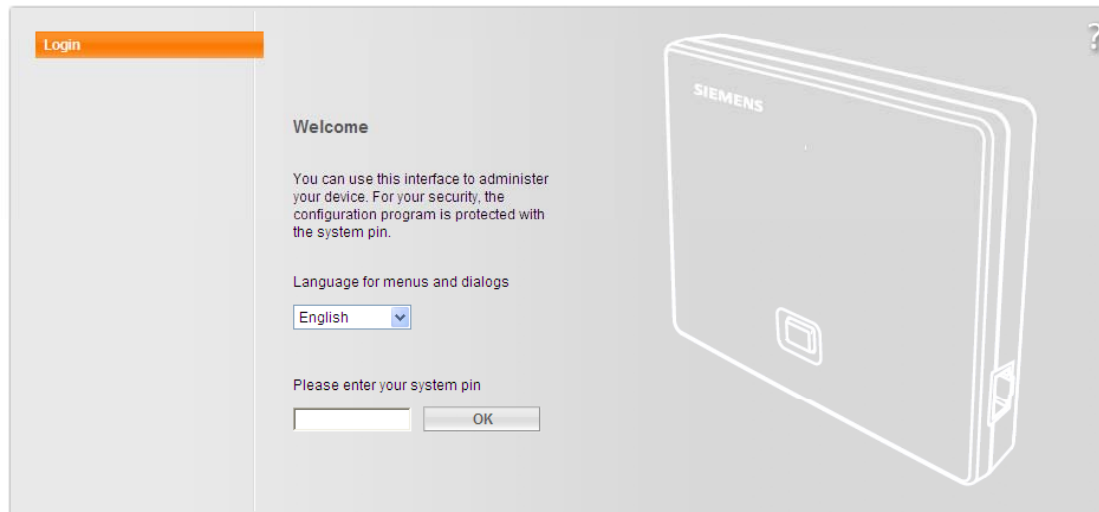


## ■ Configuring the first VoIP connection

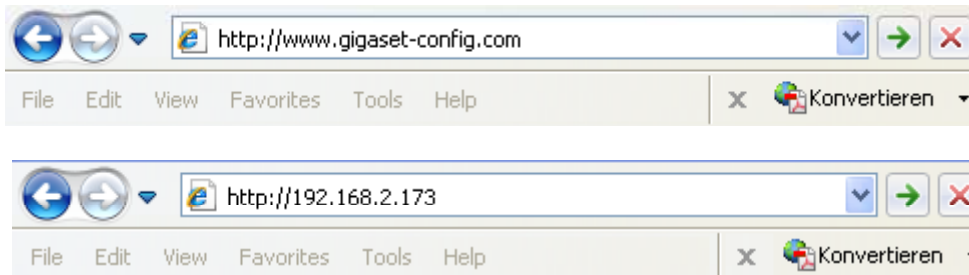

### Prerequisites:

- The phone and PC are connected to the router and the router is connected to the internet
- A Web browser is installed on the PC
- Any existing firewall allows the PC and the phone to communicate
- You have opened an account with a VoIP provider


### Open Web-Configurator:

- Enter the following URLs into the Web browser's address field:  
<http://www.gigaset-config.com>

### Oder

- Enter the telephone's current **IP address** (for example: `http://192.168.2.173`) into the address field of the Web browser.

## ■ Configuring the first VoIP connection

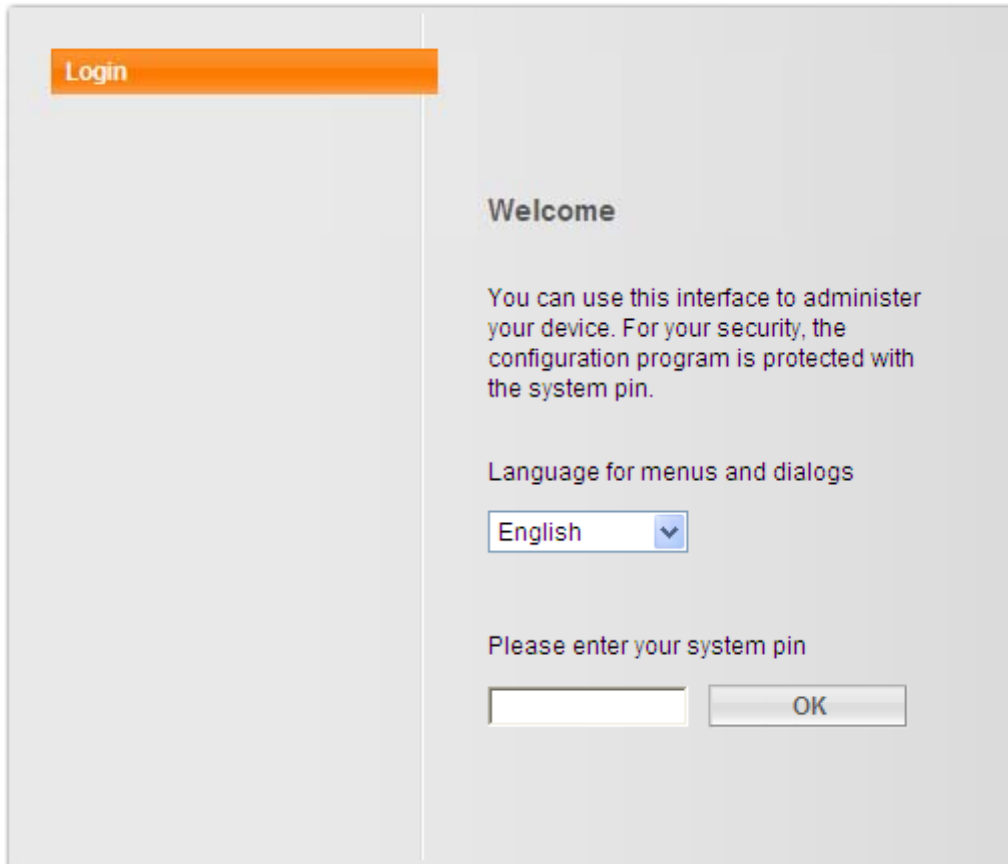

The screenshot shows a web interface with a grey background. At the top left, there is an orange bar with the word "Login" in white. Below this, the word "Welcome" is displayed in a bold, dark font. A paragraph of text follows: "You can use this interface to administer your device. For your security, the configuration program is protected with the system pin." Below the text, there is a label "Language for menus and dialogs" followed by a dropdown menu currently set to "English". At the bottom, there is a prompt "Please enter your system pin" above a text input field and an "OK" button.

Once you have successfully established the connection, the browser displays the **<Welcome>** Web configurator page.

- In the top field, select a different language if required.
- Enter your phone`s four-digit-system PIN in the bottom field. The default is '0000'.
- Click on **<OK>**
- If a security instruction is displayed: click on **<OK> again.**

## ■ Configuring the first VoIP connection

The screenshot shows the Gigaset web interface. At the top, there are tabs for 'Home', 'Settings', and 'Status', with 'Settings' selected and circled in red. On the left, a navigation tree includes 'IP Configuration', 'Telephony', 'Connections', 'Audio', 'Number Assignment', 'Call Forwarding', 'Dialling Plans', 'Network Mailbox', 'Advanced Settings', 'Messaging', 'Services', 'Handsets', 'Security', and 'Miscellaneous'. 'Connections' is highlighted in orange and circled in red. The main content area displays a table of IP connections:

	Name / Provider	Suffix	Status	Active
1.	IP1 sipgate	#1	Disabled	<input type="checkbox"/>
2.	IP2 Other Provider	#2	Disabled	<input type="checkbox"/>
3.	IP3 Other Provider	#3	Disabled	<input type="checkbox"/>
4.	IP4 Other Provider	#4	Disabled	<input type="checkbox"/>
5.	IP5 Other Provider	#5	Disabled	<input type="checkbox"/>
6.	IP6 Other Provider	#6	Disabled	<input type="checkbox"/>

Below the IP connections, there are sections for 'Phonet.ch' and 'Fixed Line Connection', each with their own columns for Name, Suffix, Status, and Active. The 'Edit' button for the first IP connection is circled in red.

- Click on **<Settings>**
- Click on **<Telephony>** in the navigation tree(left) for the following Web page.

The **<Connections>** Web page opens with all your phone`s existing connections and all those that can still be configured.

- Click on the **<Edit>** button linked to IP connection **<IP1>**

## ■ Configuring the first VoIP connection

The screenshot shows the 'Settings' tab of a Gigaset web interface. The left sidebar has 'Connections' highlighted under the 'Telephony' section. The main content area is titled '1. IP Connection' and contains the following fields and buttons:

- Connection Name or Number:** Input field containing 'IP1'.
- Auto Configuration:** A section with a text box for 'Auto Configuration Code' and a 'Start Auto Configuration' button.
- Provider:** A dropdown menu showing 'sipgate' and a 'Select VoIP Provider' button, which is circled in red.
- Personal Provider Data:** Four input fields for 'SIP-ID', 'SIP-Password', 'SIP-ID', and 'Display name'.
- Buttons:** 'Show Advanced Settings', 'Set', 'Cancel', and 'Delete' buttons are located at the bottom.

➤ Select <Select VoIP Provider> in the Auto Configuration area. This will display information on the download procedure.

## ■ Configuring the first VoIP connection

The screenshot shows a web interface with a navigation menu on the left and a main content area. The navigation menu includes 'IP Configuration', 'Telephony', 'Connections' (highlighted), 'Audio', 'Number Assignment', 'Call Forwarding', 'Dialling Plans', 'Network Mailbox', 'Advanced Settings', 'Messaging', 'Services', 'Handsets', 'Security', and 'Miscellaneous'. The main content area is titled 'Provider Selection' and contains the text 'Please choose the country from the list you want to load the provider list for.' Below this text is a dropdown menu with 'Germany' selected. At the bottom of the main content area are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Germany' dropdown and the 'Next >' button are circled in red.

➤ From the list, select the **country** for which the list of VoIP providers is to be loaded

➤ Click on **<Next>**

## ■ Configuring the first VoIP connection

The screenshot shows the 'Provider Selection' screen in the Gigaset web interface. The left sidebar contains a menu with 'Connections' highlighted. The main area has a heading 'Provider Selection' and a sub-heading 'Please choose the provider from the list you need the configuration data from.' Below this is a dropdown menu with 'sipgate' selected. At the bottom, there are three buttons: '< Back', 'Finish >', and 'Cancel'. The 'Finish >' button is circled in red.

- Select your **VoIP provider** from the list

If your provider is not included in the list, select **Other Provider**. In this case you will have to enter the general provider data by hand.

- Click on **<Finish>**

## ■ Configuring the first VoIP connection

The screenshot shows the '1. IP Connection' configuration page. The left sidebar has 'Connections' highlighted. The main content area includes:

- 1. IP Connection**: A heading with a help icon.
- Connection Name or Number:** A text input field containing 'IP1'.
- Auto Configuration**: A section with a note: 'If your provider has issued you with a configuration code, you can use it to start the automatic connection configuration here.' It includes an 'Auto Configuration Code' input field and a 'Start Auto Configuration' button.
- Provider:** A dropdown menu showing 'sipgate' and a 'Select VoIP Provider' button.
- Personal Provider Data**: A section containing:
  - SIP-ID: 1111111
  - SIP-Password: \*\*\*\*\*
  - SIP-ID: 1111111
  - Display name: (empty field)
- Buttons: 'Show Advanced Settings', 'Set' (circled in red), 'Cancel', and 'Delete'.

The details of the selected provider are loaded to your phone.

- To complete configuration of your VoIP connection, enter your **account data** in the **Personal Provider Data** area.
- Click on **<Set>**